

A19 bulb

Optional.

A19 bulb compatible with enclosed lighting fixtures.




Specifications	TL9A19D230D
Watt	9 W
Voltage	120 V
Light output	800 lm
Color	2 700 K
Dimmable	Yes
Efficacy	88.88 Lm/W

Specifications	TL9A19D230P
Watt	9 W
Voltage	120 V
Light output	800 lm
Color	5 000 K
Dimmable	Yes
Efficacy	88.88 Lm/W

Specifications	TL15A19D230D
Watt	15 W
Voltage	120 V
Light output	1 600 lm
Color	2 700 K
Dimmable	Yes
Efficacy	106.67 Lm/W

Specifications	TL15A19D230P
Watt	15 W
Voltage	120 V
Light output	1 600 lm
Color	5 000 K
Dimmable	Yes
Efficacy	106.67 Lm/W

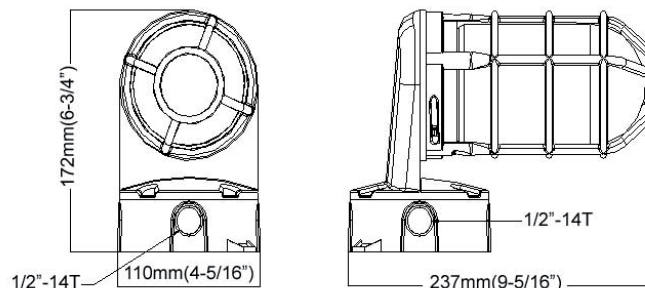

EP101AI151 Description:

- Includes: Protective, screw-in glass globe and protective grid.
- Silicone gasket.
- Socket: E26
- Color: Gray. Other colors available on request.
- Use bulbs up to 150W incandescent and 30W compact fluorescent.
- We recommend using A19 LED bulbs.
- Please ensure you use globes that comply with current safety standards.
- Bulb not included.

Applications:

Entrance ceiling, corridor, tunnel, service area.
Suitable for damp locations.