







Installation Instruction

1. Packaging Details/Installation Instruments


Model No	Power	AC Input
TLHBRX150V1X	150W	100-277V
TLHBRX150V2X	150W	277-480V
TLHBRX200V1X	200W	100-277V
TLHBRX200V2X	200W	277-480V
TLHBRX280V1X	280W	100-277V
TLHBRX280V2X	280W	277-480V
TLHBRX400V1X	400W	100-277V
TLHBRX400V2X	400W	277-480V

Packaging Details	LED High-Bay Manual	1PC 1PC
Installation Instruments	 electric drill	 screwdriver
	 pliers	 electrical insulation tape

2. Precautions:

Product installation, repair, maintenance, demolition must be performed when power is off to avoid any accident. We recommend this part to be done by a qualified electrician.

3. Installation Diagram

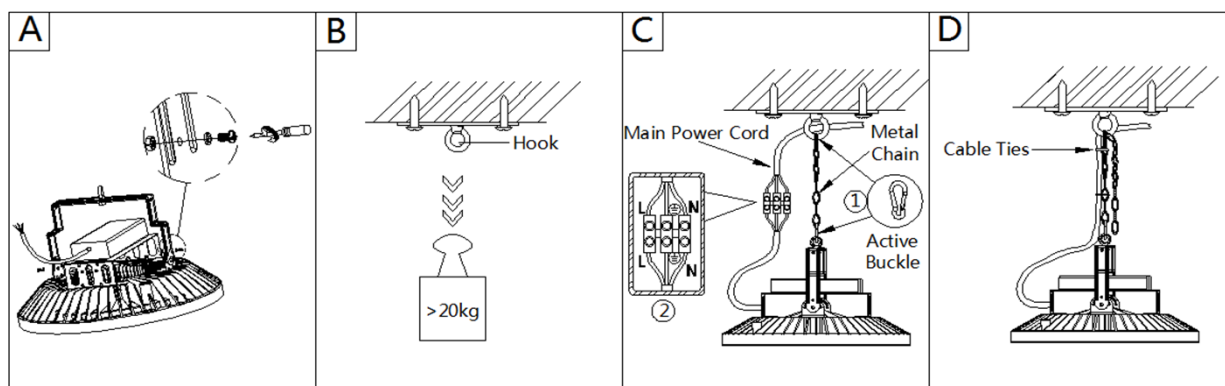

Installation Guidelines

1. Remove package and take out the product, frame and accessories. Assemble the product according to Diagram A.
2. Install the hook (not included) in a specific location with a diameter of 5-10mm, fasten and secured to hang object of 20KG and above. See diagram B.
3. Take our metal chain and hang the product on the hook, See diagram C step 1, suggest to use terminal blocks (not included) to connect power driver, (Input Voltage must follow label requirements attached on the lamp body). use electrical tape to wrap around. If product is installed in outdoor, must add a waterproof junction box (not included) to ensure level IP 65 is reached, see diagram C step 2.
4. There are two active buckles on the end of the metal chain, which could be hang on any part of the metal loops, to adjust the height of product. After completion, please use cable ties or other string to tie the wire from the driver to the chain. Plug in power after installation to light on, see diagram D.