

Project: \_\_\_\_\_ Distr./entr.: \_\_\_\_\_

Type: \_\_\_\_\_ PO: \_\_\_\_\_ Date: \_\_\_\_\_



JL-700



### Receptacle zhaga Book-18

- IP66
- IK09
- 4 contacts
- Contacts: 1.5A, 30VDC







### Included in the packaging



Information subject to change without notice. Pictures for illustration purpose only. rev. 2.6.1

## Dimensions

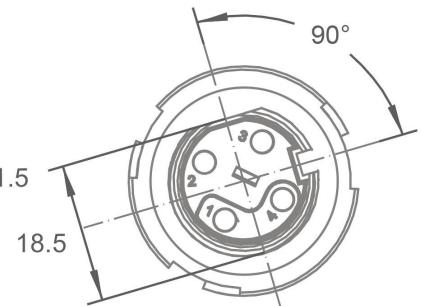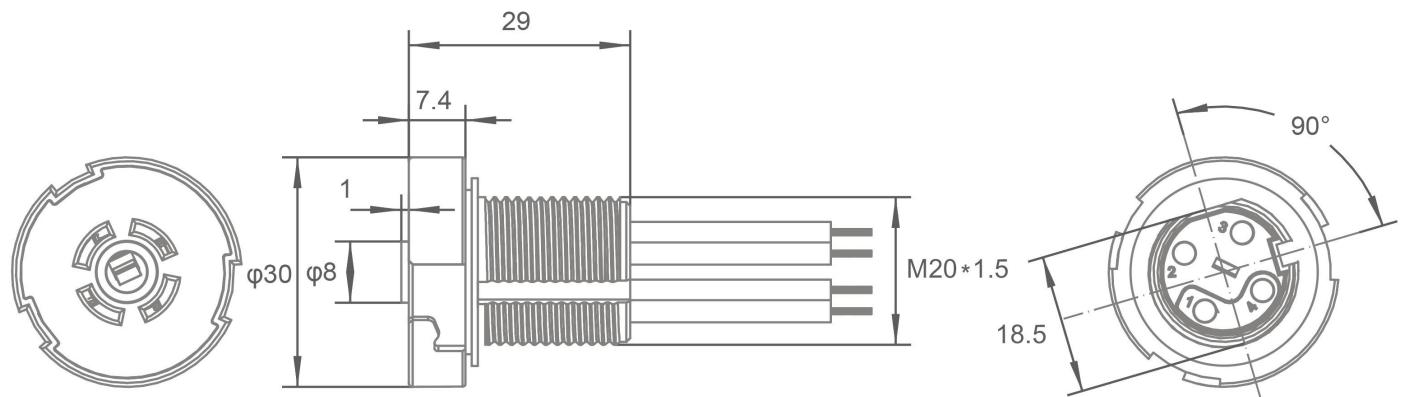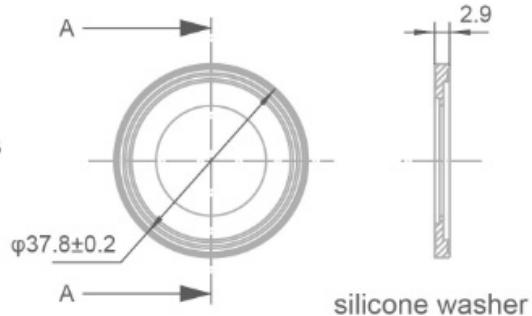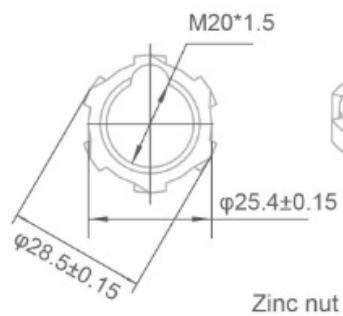

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.6.1


## Wiring

- Port 1 (Brown): 24 Vdc
- Port 2 (Gray): Dim- / Common ground
- Port 3 (Blue): Dim+
- Port 4 (Black): Optional


### OPTIONAL

If the driver does not have an auxiliary power supply, an external power supply is required. It is recommended to use the JL-700's integrated power connector.

\*If the lighting controller is a non-standard product, define the specific wiring according to the controller's pinout.

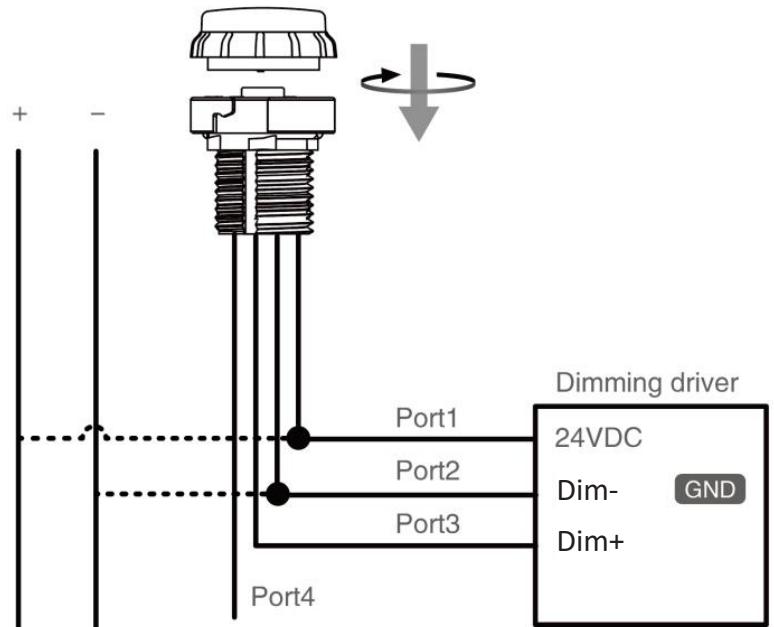

## Hole dimensions for installation

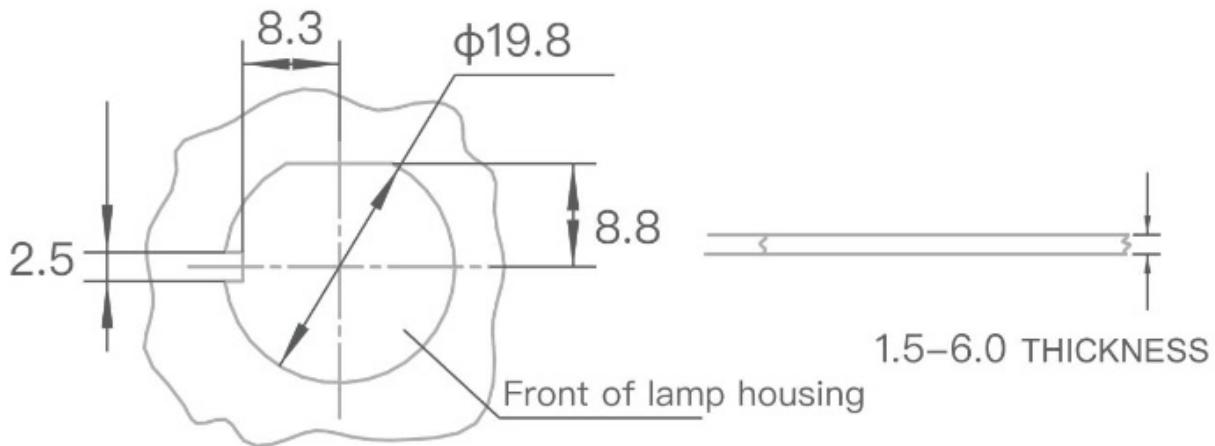

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.6.1