




3/4/6/8 INCH 3&5CCT ROUND SLIM PANEL

# Installation Instructions

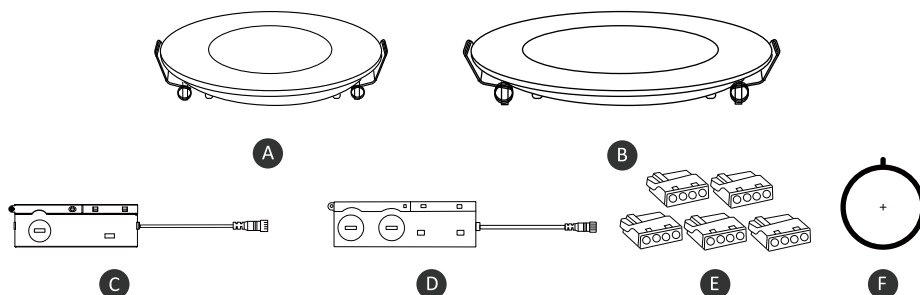

## PACKAGE CONTENTS

| PART | DESCRIPTION                    | QUANTITY | PART | DESCRIPTION                        | QUANTITY |
|------|--------------------------------|----------|------|------------------------------------|----------|
| A    | 3 INCH 3&5CCT ROUND SLIM PANEL | 1        | B    | 4/6/8 INCH 3&5CCT ROUND SLIM PANEL | 1        |
| C    | J-Box driver                   | 1        | D    | J-Box driver                       | 1        |
| E    | Connector                      | 5        | E    | Connector                          | 5        |
| F    | Hole cutout card               | 1        | F    | Hole cutout card                   | 1        |

## DIMMING INFORMATION

This recessed downlight is suitable for use in dimming circuits. For 100% to 10% light control, use with an LED compatible dimmer.(Input 120-277V 60Hz)

|               |                                                |                |           |
|---------------|------------------------------------------------|----------------|-----------|
| <b>LUTRON</b> | RMJS-8T-DV-B, Diva DVSTV, MS-Z101-WH, DVSTV-WH | <b>LEGRAND</b> | RH4FBL3PW |
|---------------|------------------------------------------------|----------------|-----------|

## IMPORTANT

**READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES. RETAIN FOR FUTURE REFERENCE.**

### SAFETY

For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

### ASSEMBLY INSTRUCTIONS

1. Preparing for installation: disconnect electrical power before installing or servicing any part of this fixture.
2. Locate a suitable position to plate the fixture and open in accordance to the cut-hole dimensions (refer to hole cut table for appropriate size).
3. Run electrical wire from the switch (power supply) through the mounting hole-use nmd90 romex or bx cable.

### WARNING

- Make certain power is off from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.
- Risk of fire or electrical shock. Do not alter, relocate or remove wiring, junction box, power supply or any other electrical components.

- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

## INSTALLATION STEPS

**1.** Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter, see Fig1.

### HOLE SIZE

3INCH: 3 5/64" (78mm)  
 4INCH: 4 21/64" (110mm)  
 6INCH: 6 19/64" (160mm)  
 8INCH: 8 5/64" (205mm)




Fig1

**2.** Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 5 connectors. Attach white to white, black to black, copper to the ground wire, Connect purple wire to 0-10V DIM+. Connect pink wire to 0-10V DIM-, see Fig 2.

Black — L  
 White — N  
 Copper — G

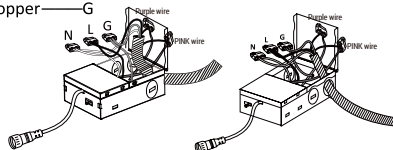


Fig2

**3.** Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch, see Fig3.

5 IN 1 27K/30K/35K/40K/50K  
 27K/30K/40K/50K/60K  
 3 IN 1 30K/40K/50K

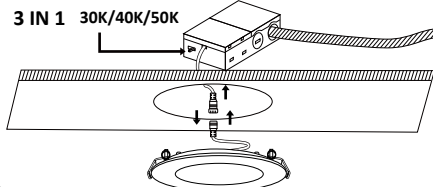


Fig3

**4.** Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling, see Fig4.

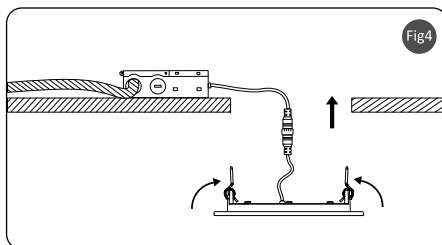


Fig4

**5.** Turn on the power after installation, check the fixture can work well, see Fig5.

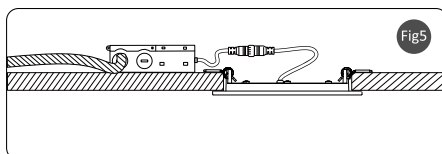


Fig5