


UP/DOWN PENDANT LED ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

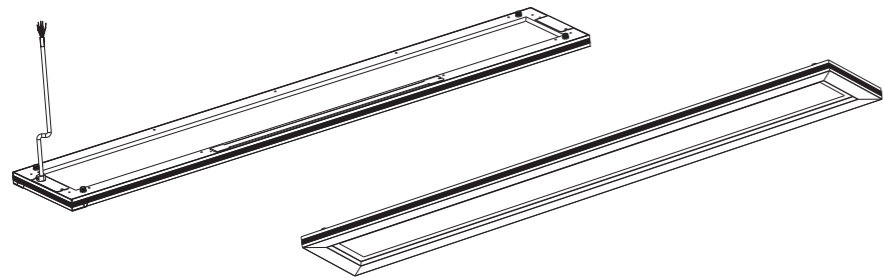


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. Seamless continue runs per power feed:
 - 40W: Up to 10 pcs in 120V AC, 20 pcs in 230V AC and 25 pcs in 277V AC
 - 60W: Up to 7 pcs in 120V AC, 13 pcs in 230V AC and 16 pcs in 277V AC
 - 80W: Up to 5 pcs in 120V AC, 10 pcs in 230V AC and 12 pcs in 277V AC

ATTENTION




SHOCK HAZARD!
May result in serious injury or death.
Turn power OFF at circuit breaker prior to installation or servicing.



Once final building cleanup has been completed, remove remaining lens protective film.


WIRING

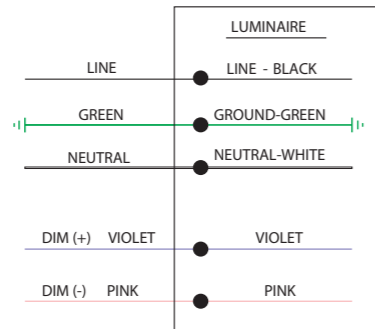


DRY CEILING PENDANT LED ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED




▶ NON POWER SUSPENSION

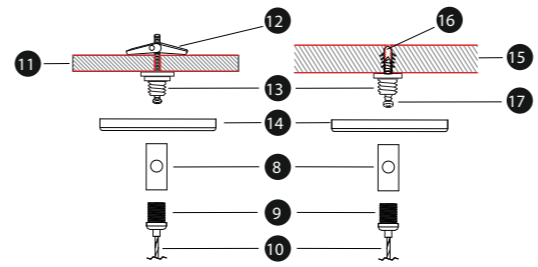

▶ PARTS LIST


- 1 4" Octagon Junction Box (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 Junction Box Crossbar
- 5 Screw PM4*22
- 6 Power Cord
- 7 4" Canopy Power Feed
- 8 Cable Holder
- 9 Strain Relief Thread Nut
- 10 Aircraft Cable
- 11 Drywall Ceiling (By Others)
- 12 Butterfly Drywall Anchor
- 13 Crimp Stud
- 14 2" Canopy
- 15 Solid Ceiling (By Others)
- 16 Anchor
- 17 Screw PA4*30

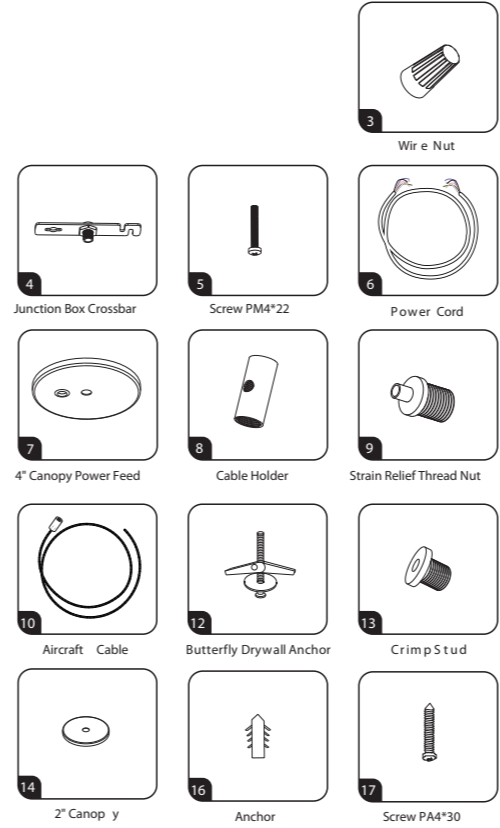


DROP CEILING PENDANT LED ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED

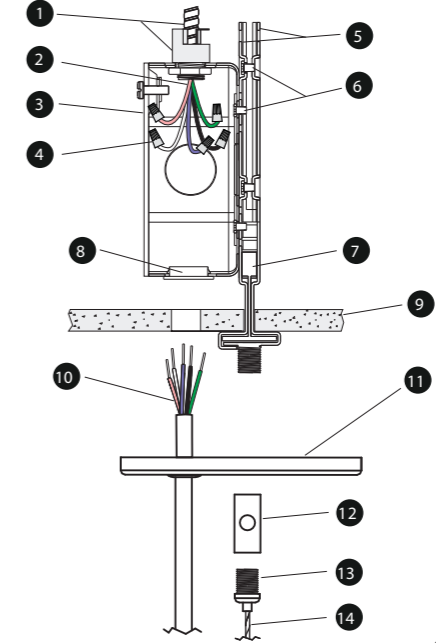


▶ NON POWER SUSPENSION

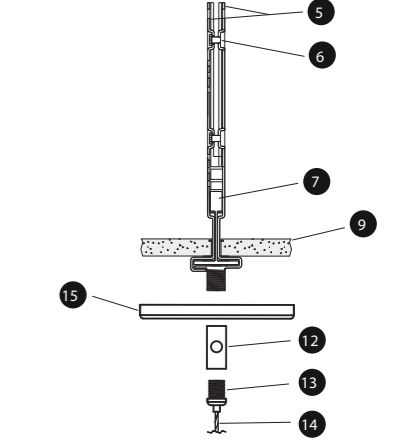

▶ PARTS LIST

- 1 Armored Cable & Connector (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 4" Octagon Junction Box
- 5 Assembled T-grid Clips
- 6 Screw 6#*4
- 7 T-grid (By Others)
- 8 Plastic Grommet
- 9 Ceiling Tile (By Others)
- 10 Power Cord
- 11 4" Canopy Power Feed
- 12 Cable Holder
- 13 Strain Relief Thread Nut
- 14 Aircraft Cable
- 15 2" Canopy

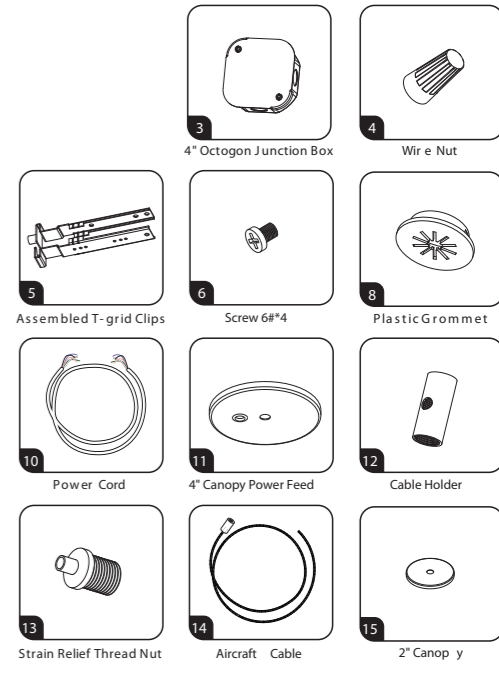


INDEPENDENT PENDANT LED

ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


► **4FT UP/DOWN LINEAR**

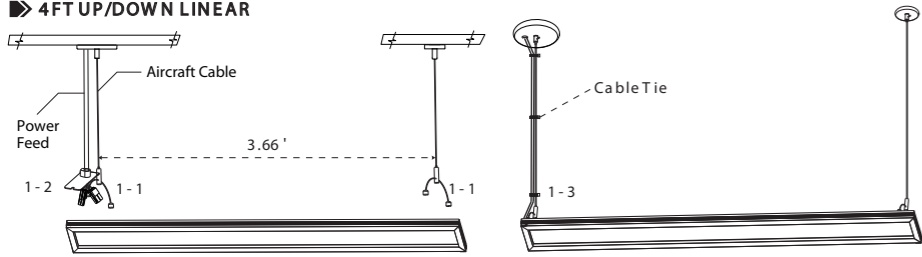

- 1-1: Screw aircraft cables clockwise on the top of luminaire.
- 1-2: Connect the quick connectors properly.
- 1-3: Zip tight power cord & aircraft suspension cable with the cable tie if needed.

⚠ Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.

► **6FT & 8FT UP/DOWN LINEAR**

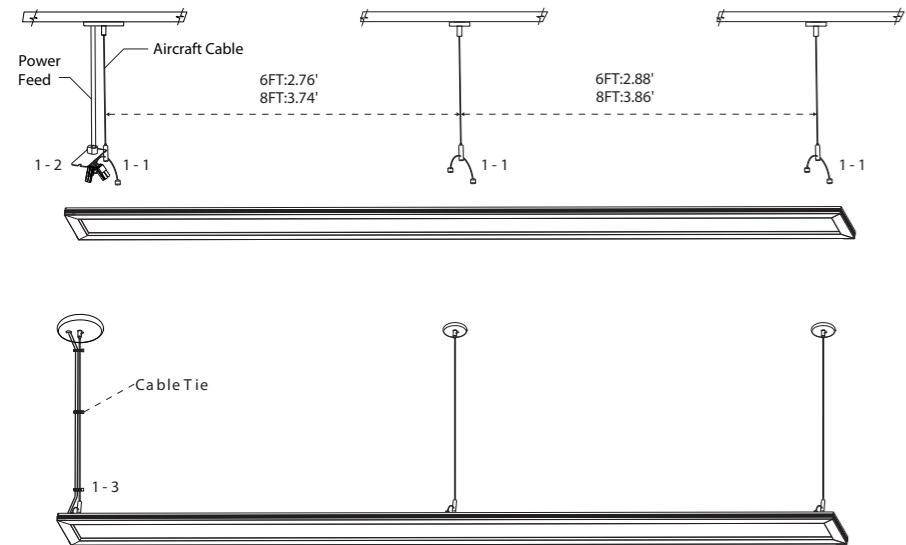


MULTIPLE LUMINAIRE CONNECTION PENDANT LED

ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

► **4FT UP/DOWN LINEAR**

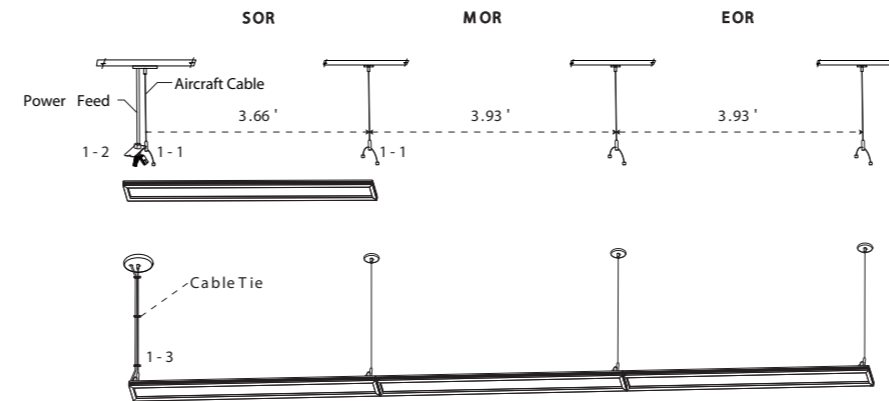

Hang Luminaires


- 1-1: Screw aircraft cables clockwise on the top of luminaires.
- 1-2: Connect the quick connectors properly.
- 1-3: Zip tight power cord & aircraft suspension cable with the cable tie if needed.

⚠ Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.


Seamless Continue Runs Per Power Feed

- 40W: Upto 10 pcs in 120VAC, 20 pcs in 230VAC and 25 pcs in 277VAC
- 54W: Upto 8 pcs in 120VAC, 15 pcs in 230VAC and 18 pcs in 277VAC
- 80W: Upto 5 pcs in 120VAC, 10 pcs in 230VAC and 12 pcs in 277VAC


► **6FT & 8FT UP/DOWN LINEAR**

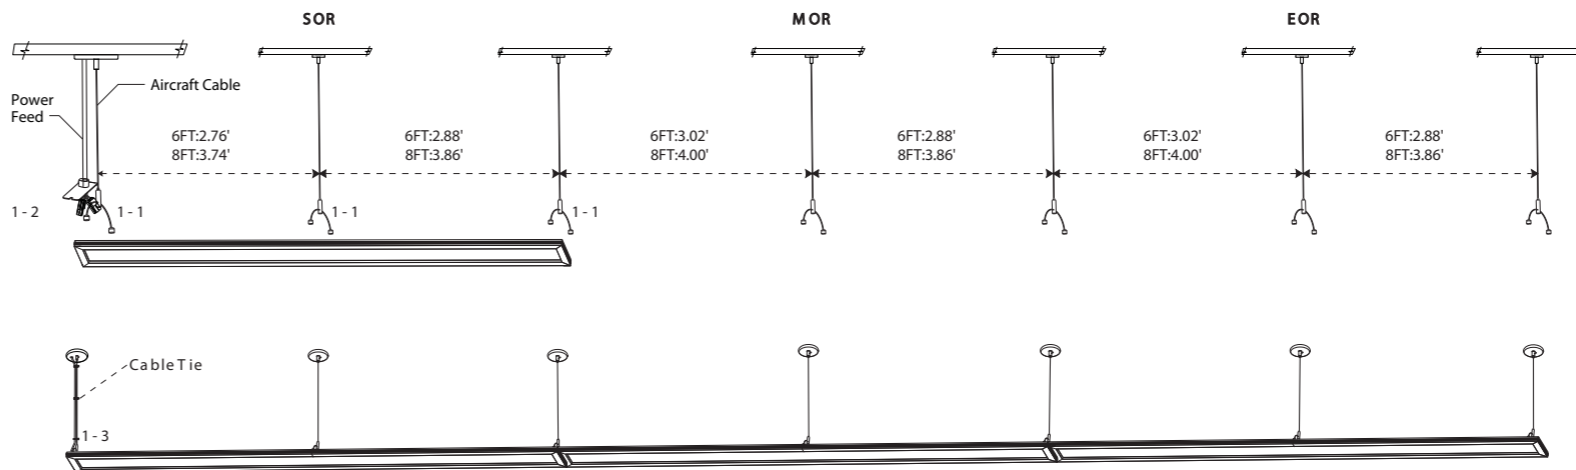


Joint Steps

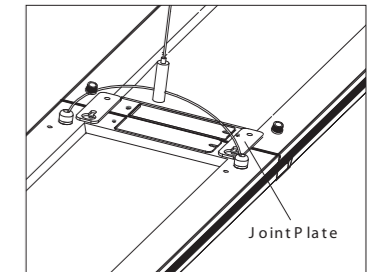

① Joint two luminaires together by mounting the Joint plate on the both sides as shown.

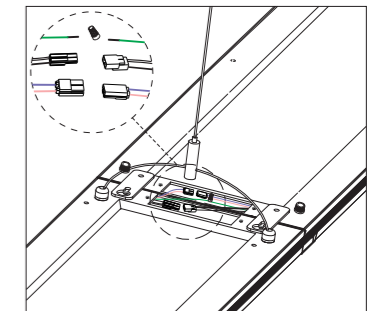

② Remove the existing covers, then connect the quick connectors properly.

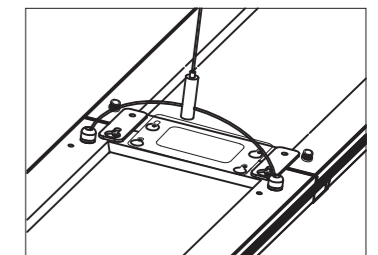

③ Mount the joint cover by screw.