

⚠ WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.

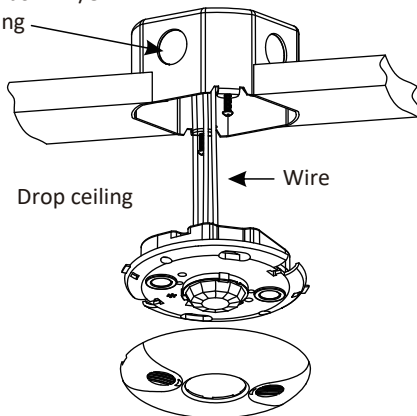
MOUNTING

Using an octagonal junction box


1. Pull the high voltage wires into the junction box through the conduit knockout.
2. Connect the high voltage wires to the appropriate terminals on the sensor.
3. Loosen the appliance mounting screws attached to the junction box.
4. Align the sensor in the junction box so that the mounting screws on the box match the key holes on the sensor's rear housing.
5. Push the sensor up into the junction box and twist it so that the mounting screws are seated in the keyhole slots.
6. Tighten the two screws to secure the sensor to the junction box.
7. Snap the front cover onto the sensor.





Installation with a TSBCP4AP relay: Provide an RJ45 connection terminal (TSRTP model) between the sensor and the relay.

4" octagonal box 2-1/8"
deep mounting






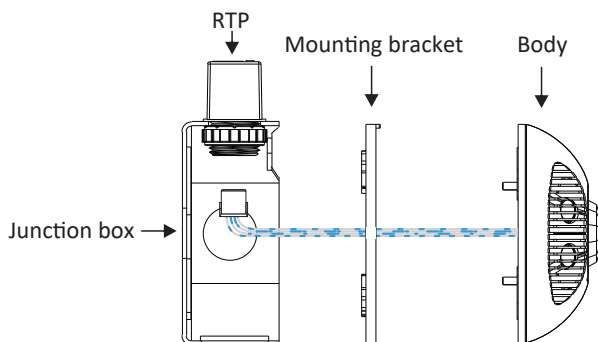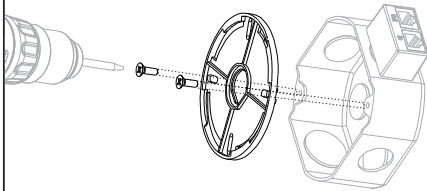TSSDE7D INSTALLATION INSTRUCTIONS FOR THE BRACKET




Step 1: Fix the RTP to the junction box	Step 2: Connect the wiring harness to the RTP	Step 3: Secure the installation bracket to the junction box using self-tapping screws.
		
Step 4: Secure the cable harness exit slot and bracket by aligning the latches and rotating them into place.		
		

TSSDE7D SPIRAL BOLT INSTALLATION INSTRUCTIONS

Step 1: Insert the spiral bolt into the installation bracket.	Step 2: Install the spiral bolt bracket onto the ceiling and secure it with washers and nuts.	Step 3: Cover the bracket and align it with the slots, then press firmly to secure it in place.
		

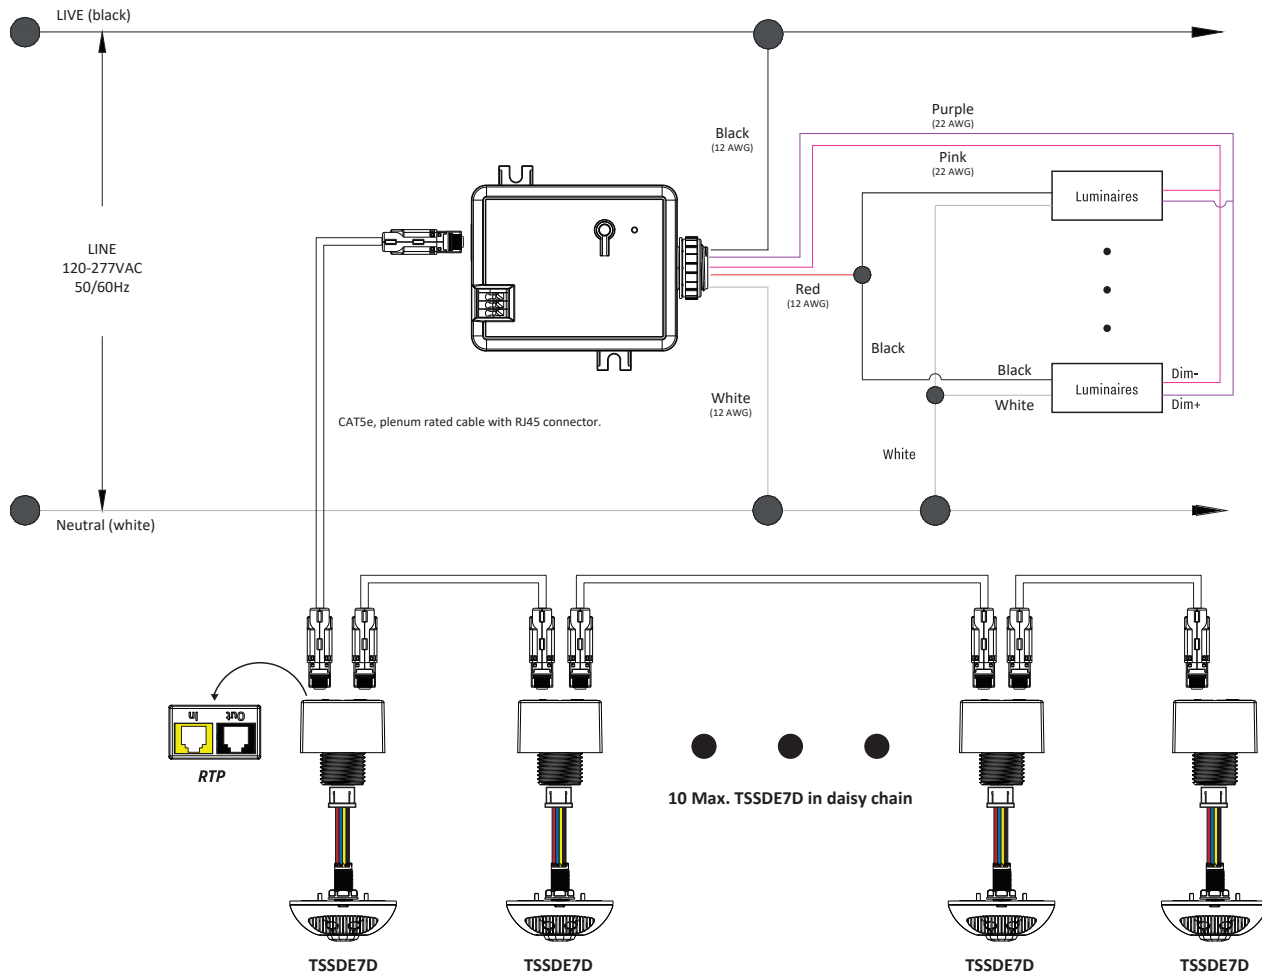
WIRING




TIPS: This Bluetooth device is compatible with Technilight Smart lighting control system only.

How to install Technilight Smart APP?

Download our app:



Technilight Smart
Google play
Android



Technilight Smart
Apple store
iOS

WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.