

This procedure is designed as an installation aid. Skilled tradespeople that are familiar with general construction and electrical installation techniques should perform the installation. Licensed electricians should provide electrical installation connections. Installations and connections should be done in accordance with all national and local codes and permits. In no way is this document intended to construe warranty or fitness of use of the products described, nor is it intended to provide safety instruction for those installing the product.

WARNING

Before proceeding with installation or service maintenance of this product:

- Disconnect power to reduce electrical shock risk.
- Review the entire Installation Guide.
- Inspect this properly packaged product for any damage that may have occurred during transit.
- Verify product application complies with manufacturer design recommendations.
- Verify the availability of necessary tools and incidental material.
- Verify applicable code requirements. Field assembly and installation are subject to acceptance by local inspection authority.
- Appropriate safety equipment to be determined by end user, per applicable safety standards and precautions.

Bracket SF Slipfitter



A

Step 1 - Remove the screws from the bracket (Figure A)



B

Step 2 - Pass the wire through the lamp post and fix the lamp (Figure B)



C


Step 3 - Loosen M16 screw for angle adjustment



D


Step 4 - Connect the L,N, GND wires on the lamp to the corresponding L,N,GND cables on the pole (Figure D)

Bracket PA Adjustable Arm Mount

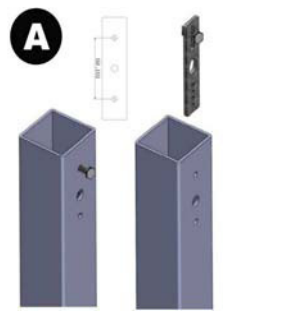


A

Step 1 - Install the back plate inside the pole with top bolt, nut and washer (Figure A)

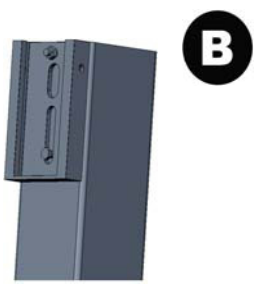


B

Step 2 - Install the adapter bracket. (Figure B)



C

Step 3 - Hang the luminaire on top bolt (Figure C)

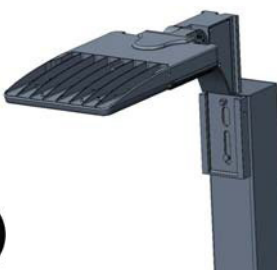

D

Step 4 - Align bottom holes in the luminaire and back plate with closest hole in the pole, install lower bolt, and tighten both bolts.

Step 5 - Connect grounding

Bracket TU installation method

A

Step 1 - Play two holes in the wall or ceiling (Figure A)




B

Step 2 - Push the expansion screw into the wall or ceiling




C

Step 3 - Fix the fixture on the wall or ceiling and adjust the angle



D

Step 4 - Connect the L,N,GND wires on the lamp to the corresponding L,N,GND cables on the pole (Figure D)

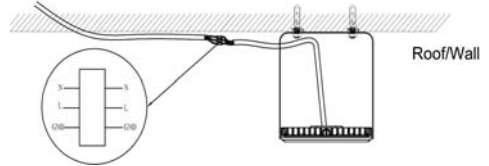

Bracket PM Slide and Lock Mount


Step1: Fix the bracket A part on the lamp body and fix it with M8 screws. (Figure A)



A



Step2: Mount bracket B on the pole and screw it. (Figure B)

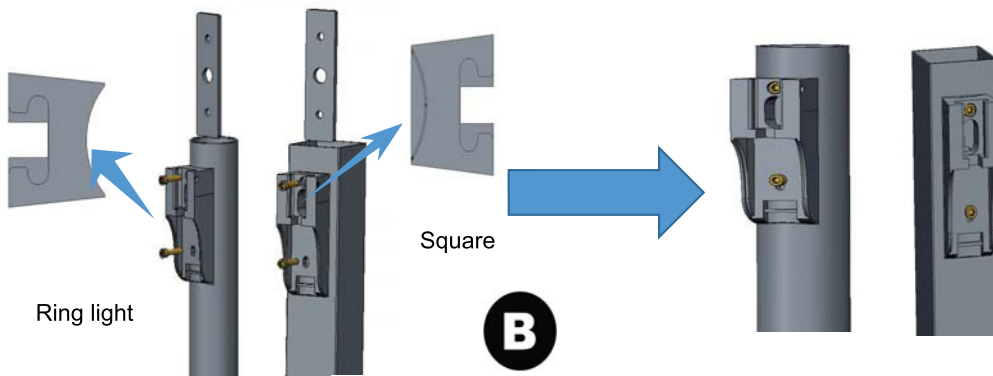

B


Step3: Fix the lamp body with the bracket installed to the bracket B of the pole and fix it with M4 screws. (Figure C)



C




Step4: Wiring, connect the L,N,GND wires on the lamp to the corresponding L,N,GND cables on the pole.
(Figure D)

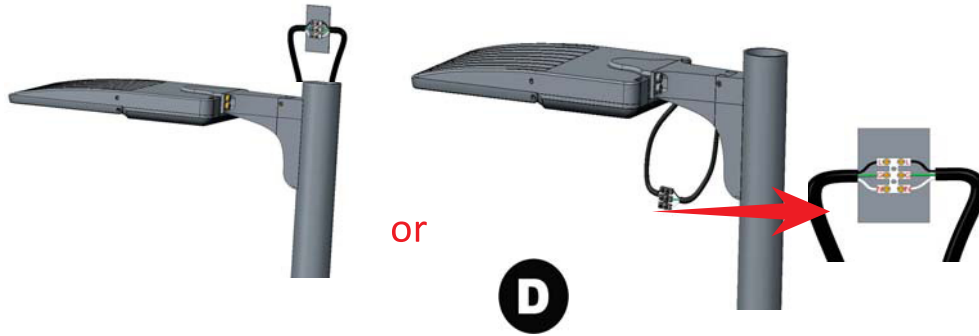

Step5: Mount the bracket cover at the bottom of the bracket. (Figure E)



Bracket E Direct Arm Mount

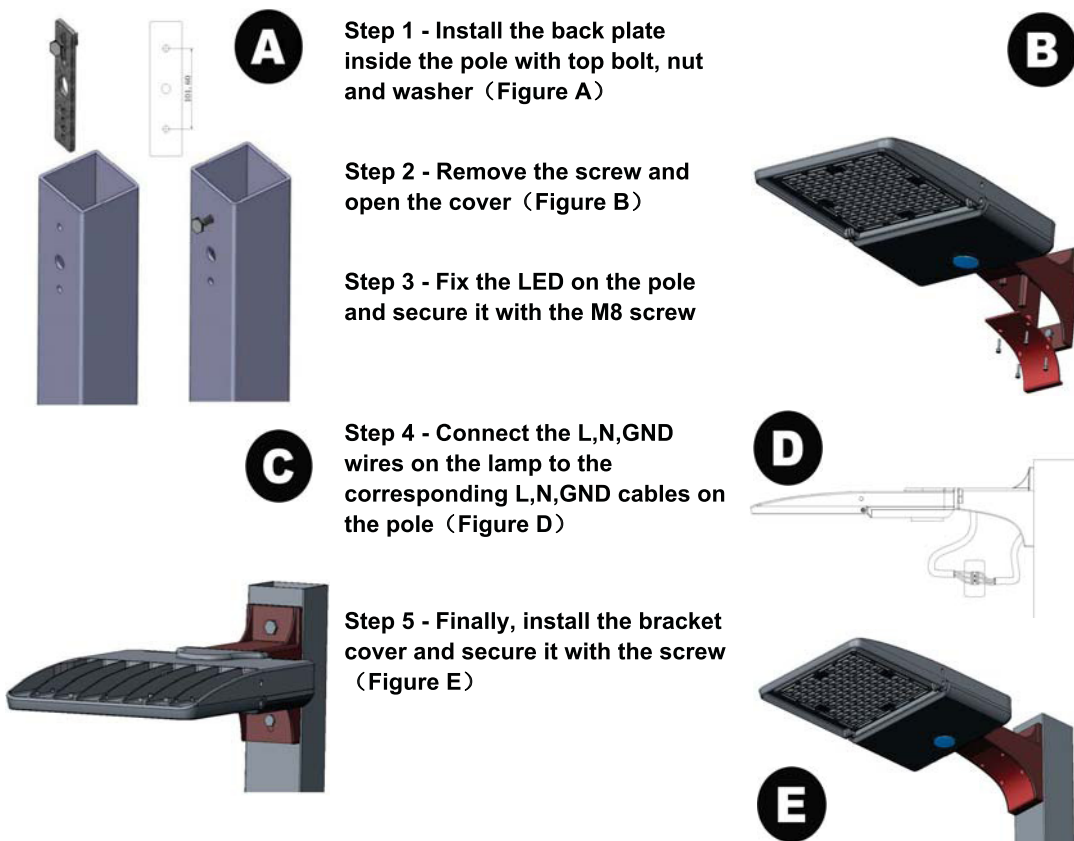

Bracket F installation method



A

Step 1-Install the backplane and bracket adapter on the pole with top bolts, nuts and washers


Step 2 - Remove the screw and open the cover (Figure B)

Step 3 - Fix the LED on the stand adapter and secure with the M8 screw (Figure C)




C

Step 4 - Connect the L,N,GND wires on the lamp to the corresponding L,N,GND cables on the pole



B

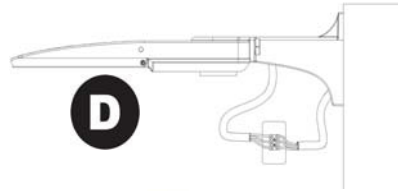

D

Step 5 - Finally, install the bracket cover and secure it with the screw (Figure E)



E

Bracket TR installation method


A



Step 1 - Play two holes in the wall or ceiling

Step 2 -Push the expansion screw into the

C



Step 3 -Fix the fixture on the wall or ceiling (Figure

Step 4 - Loosen screw for angle adjustment

E



Step 5 - Finally,Lock

B



D

