

LED Dock Light series

INSTRUCTION MANUAL

- Thank you for purchasing our product. Please read the below articles carefully to see how to use this product safely.
- Warning contents and attention contents related to product safely use, please be sure to follow it.

⚠ WARNING



Risk of Fire, Electrical Shock, Cuts or other Casualty Hazards-Installation and maintenance of this product must be performed by a qualified electrician. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved.



Risk of Fire and Electric Shock-Make certain power is OFF before starting installation or attempting any maintenance. Disconnect power at fuse or circuit breaker.



Risk of Fire-Minimum 90°C supply conductors.
Risk of Burn-Disconnect power and allow fixture to cool before handling or servicing.
Risk of Personal Injury-Due to sharp edges, handle with care.





Failure to comply with these instructions may result in death, serious bodily injury and property damage.

Attention

- 1.This product within the input voltage range: 100-277V,50/60Hz.
- 2.If input voltage exceeds this range, it may cause the lamp failure. Please be sure to operate under correct input voltage.
- 3.Ensure ambient operating temperature of -35°C-55°C.
- 4.Using this product in temperatures outside of this range will reduce the product lifespan.
- 5.Make sure to turn off power before starting the installation process.
- 6.IP rating of Ip65, can work under damp/wet locations.
- 7.Please keep the product away from any corrosive substance. When you clean it, please use damp or dry cloth.


Wiring Diagram

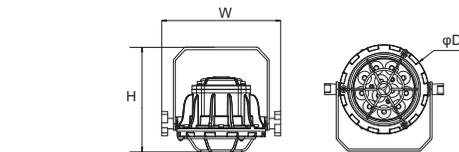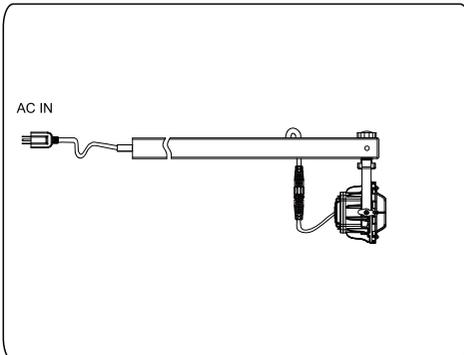


Model	20W	30W	50W	60W
W	177mm/6.97"	177mm/6.97"	237mm/9.33"	237mm/9.33"
H	157.5mm/6.20"	157.5mm/6.20"	246.4mm/9.70"	246.4mm/9.70"
φ	134mm/5.28"	134mm/5.28"	195mm/7.68"	195mm/7.68"

Product Dimension:

Bracke A1/A3




Bracke B1/B3




Bracke C1/C3




Bracke A2



Bracke B2



Bracke C2



	L1	L2	L3
Bracket A1	1007mm/39.65"	600mm/23.62"	450mm/17.72"
Bracket A2	1007mm/39.65"	600mm/23.62"	450mm/17.72"
Bracket A3	1507mm/59.33"	900mm/35.43"	650mm/25.59"

	L1	L2	L3
Bracket B1	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket B2	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket B3	1567.5mm/61.71"	900mm/35.43"	650mm/25.59"

	L1	L2	L3
Bracket C1	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket C2	1067.5mm/42.02"	600mm/23.62"	450mm/17.72"
Bracket C3	1567.5mm/61.71"	900mm/35.43"	650mm/25.59"


Installation

1. Installation accessories


- 1) 3 kinds of optional screws types (sale separately)




- 2) 3 kinds of optional wall mounting plates

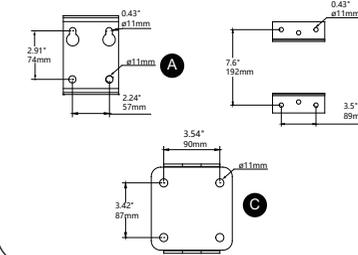


2. Drill holes in the wall according to the size of wall mounting plate



3. Fix the bracket with screws on the wall



4 pieces M10*80mm bolts (sale separately)



4 pieces M10*80mm bolts (sale separately)

4. Install the lamp body on the bracket

