






Installation Instructions

5 / 7 / 9 inch 5 CCT die-cast surface mount

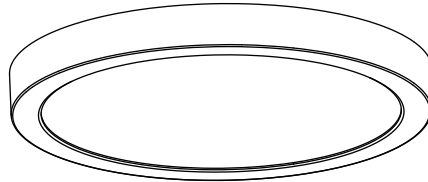

PACKAGE CONTENTS

PART	DESCRIPTION	QUANTITY
A	5 / 7 / 9 inch 5CCT die-cast surface mount	1
B	Bracket	1
C	Wire Nuts	3
D	Screws	2

DIMMER RECOMMENDATION

This unit may operate on other dimmers we haven't tested with. (Input 120V 60Hz)

LEVITON	6672, RNL06, IPL06, DSL06, 6674
LUTRON	TG-600PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153PH-WH, GT-600P, DVCL-153P, MSCL-OP153M, PD-6WCL, MACL-153M//MA-R

IMPORTANT

Please read carefully and save these instructions, as you may need them at a later date. When using electrical equipment, basic safety precautions should always be followed as below:


READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with connections obtain the services of a qualified electrician.


- Risk of fire or electric shock.
- Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit Installation.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- This device is not intended for use with emergency exit.
- This fixture is 5%-100% dimmable. Please refer to a compatible dimmer list.
- Suitable for damp locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

INSTALLATION STEPS


- 1.** Make sure power is OFF and the J-BOX is securely mounted before installing the fixture (This flush mount panel is compatible with 2.75" and 3.5" Junction Box.), See Fig 1.

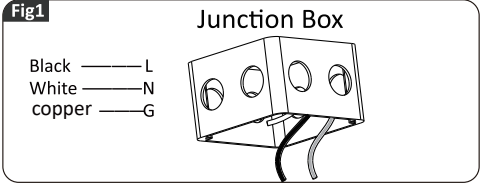


- 2.** Refer to the hole position on the bracket and do the matching to J-Box. Attach them with screws, see Fig2.

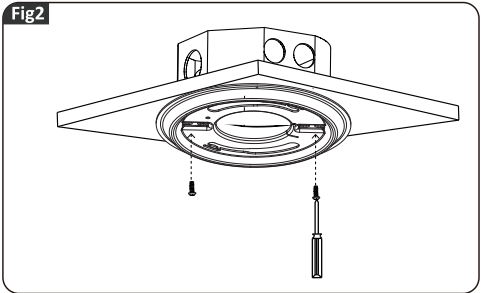

- 3.** Select lamp color desired with the CCT switch, see Fig3.

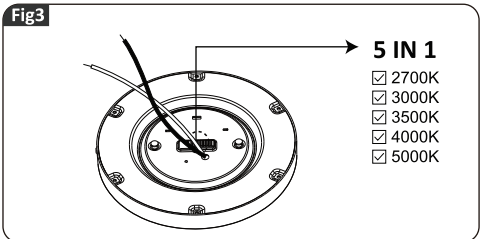

- 4.** Connect supply wires to wires on fixture/ bracket with wire nuts. Attach white to white, black to black, and copper wire to green wire as grounding connection, see Fig4.

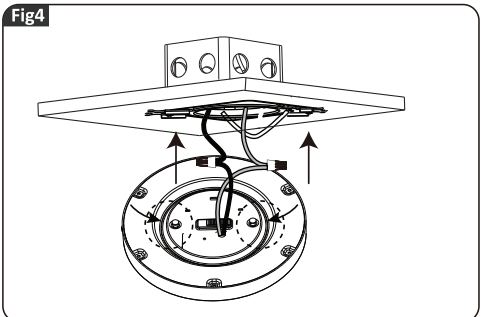

- 5.** Arrange the wires into the J-Box. Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. Turn on the power after installation, check the fixture can work well, see Fig5.

