

**⚠ WARNING:** May result in serious injury or death. Turn off power at circuit breaker before installing the unit.



### FEATURES

- BT programming compatible via iOS or Android smartphone with the Technilight Smart app.
- Manual on / off and dimming control. Dimming compatible with Technilight Smart components designed for this purpose (relays, occupancy sensors, etc.).
- Compatible with Technilight Smart devices and components.
- Suitable for retrofit installations (ON/OFF only). (Dimming is done via Technilight Smart components and programming).
- Recessed installation with a dedicated mounting box.


### SPECIFICATIONS

Voltage	120~277VAC, 50/60Hz
Current	10 mA Max
Wire strip length	16 mm (5/8")
Transmit line distance	100'
Operating temperature	32°F-104°F

### WIRING


1. Remove wall plate, switch mounting screws.
2. Carefully remove the switch from the switch box. DO NOT disconnect the wires.
3. There are three wiring connections on the switch, these are marked LIVE, NEUTRAL, GROUND.
4. Disconnect the wires from the existing switch.
5. Connect the green wire to the GROUND terminal.
6. Connect the white wire to the terminal marked NEUTRAL.
7. Connect the black wire to the terminal marked LIVE.
8. Check connections to be sure they are tight and no bare conductors are exposed.
9. Insert the switch into the outlet box carefully.
10. Make sure the switch to the box using the supplied screws.
11. Attach the wall plate.
12. Restore power to the circuit breaker and test the system.

**TIPS:** This Bluetooth device is compatible with Technilight Smart lighting control system only.

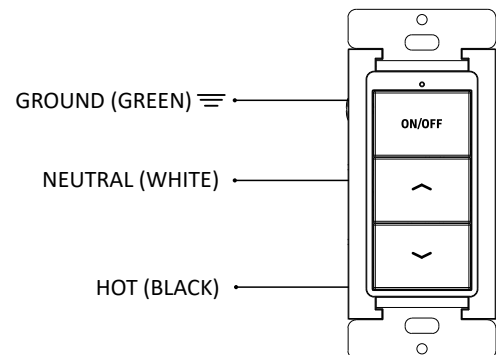

- Wire strip length; 16 mm (5/8 in)
- The device shall install in a standard outlet box.

### INSTRUCTIONS

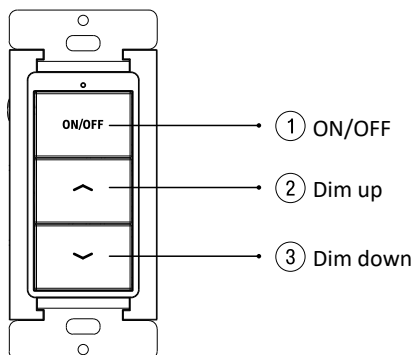

- Follow the instructions to connect Bluetooth wall switch to the lights.
  - Press button ① and ② together over 3 seconds to enter pairing mode and achieve reset function.
- This switch can be scanned in next 30 seconds.
- In Technilight Smart app "switch" page, click to add the switch.
  - Select the light/light group to be controlled by this switch.
  - Detail operation please refer Technilight Smart instruction.

### How to install Technilight Smart APP?

Download our app:



Technilight Smart  
Google play  
Android



Technilight Smart  
Apple store  
iOS

### WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.