


Motion sensor (location)

Easy distribution change

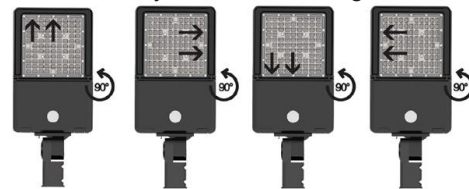

Shown bracket model: TLASSFPK. Bracket not included.

Optional accessories available



## Specifications TLAS420HT4MPBK

### Electrical Specifications

Model No.	TLAS420HT4MPBK
DLC ID	PLE7R9YAT1IP
Power (W) ± 10%	420 W (DLC: 420 W)
Input Voltage (V)	200-480V, 50/60Hz
Efficacy ± 3%	157.27 lm/W
Power Factor (PF)	0.9
Dimmable	0-10V
Replace MH/HPS	1 000 W
Surge protection	10 Kv
Total harmonic distortion	<15%

### Photometric Specifications

CRI	73.3
CCT	5 000 K
Beam angle	Type IV Medium (119.4°)
Light Output ± 3%	66 053 lm
BUG rating	B3-U0-G5

### Mechanical Specifications

IP Rating	IP66
Material	Aluminum
Lens	PC
Net Weight	10.5 kg
Product size (mm)	± 565 x 360 x 75 mm
Product size (inch)	± 22 1/4 x 14 x 3 in
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C
Lumen maintenance	N/A

## Product Description:

- Light and slim housing.
- Optional photocell. Installation on top of the luminaire. Drilling required.
- Optional motion sensor.
- Easily replace traditional MH or HPS luminaire.
- Powerful light efficacy.
- Saves in electricity consumption compared to fluorescent lighting fixture.
- 3 000 K, 4 000 K and 5 700 K available on special request.
- Color: Black. Other colors available on special request.
- Warranty: 5 Years.

## Applications:

Outdoor parking and wide area.