

Specifications TLBL6US24ADB42

Electrical Specifications


Model No.	TLBL6US24ADB42
DLC ID	N/A
Power (W) selectable $\pm 10\%$	14W / 19W / 24W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy $\pm 3\%$	100 lm/W
Power Factor (PF)	0.9
Surge protection	4 Kv
Total harmonic distortion	$\leq 15\%$
Dimmable	Non

Photometric Specifications

CRI	70
CCT selectable	3000K / 4000K / 5000K
Beam angle	N/D
Light Output $\pm 3\%$	14W: 1 400 lm 19W: 1 900 lm 24W: 2 400 lm

Mechanical Specifications

IP Rating	IP65
Material	Aluminum + PC
Lens	Clear
Net Weight	N/A
Product size (mm)	$\pm \text{Ø}160 \times 1\,025.2 \text{ mm}$
Product size (inch)	$\pm \text{Ø}6.3" \times 40.36"$
Operating Humidity	10% à 90%
Operating Temperature	-40°C à 45°C
Lumen maintenance LM-80	N/A

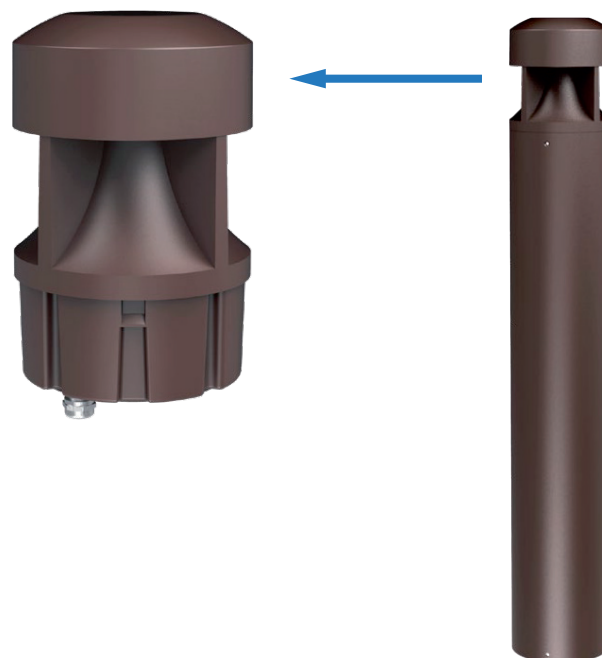

Product description:

- Selectable power, CCT and lighting zone.
- Its versatile design makes installation easy which reduces installation time and costs.
- Corrosion-resistant.
- Savings on energy consumption compared to conventional lighting.
- Warranty: 5 years.
- Color: bronze.
- Other colors available on request.
- Possibility of changing only the head. Other models available, not included.

Applications:

Circulation areas, building entrances, campuses, parking lots, hiking trails, etc.

SELECTABLE LIGHTING ZONE

