



Canopy

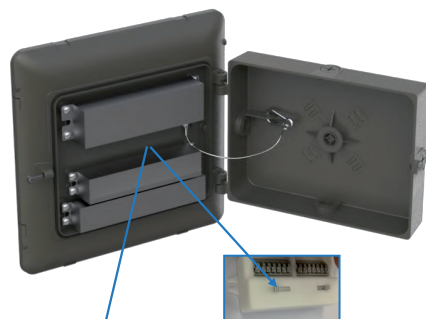

Selectable power and CCT

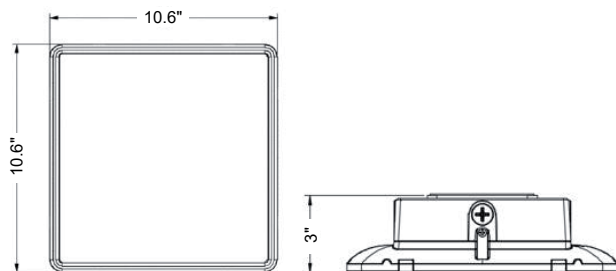

Specifications TLCAUSF70ABK

Electrical Specifications

Model No.	TLCAUSF70ABK
DLC ID	S-2GKUHL
Power (W) ± 10% selectable	45 W / 55 W / 70 W
Input Voltage (V)	120-347 V, 50/60 Hz
Efficacy ± 3%	130 lm/W
Power Factor (PF)	0.9
Surge protection	4 Kv
Total harmonic distortion	<20%

Photometric Specifications



CRI	70
CCT selectable	3000K / 4000K / 5000K
Beam angle	120°
Light Output ± 3%	45W: 5850 lm 55W: 7150 lm 70W: 9100 lm
Dimmable	0-10V

Mechanical Specifications

IP Rating	IP65
Material	Aluminum
Lens	Frosted (Glass)
Net Weight	2.8 kg
Product size (mm)	± 268 x 268 x 77.5 mm
Product size (inch)	± 10.6" x 10.6" x 3"
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 45°C
Lumen maintenance	>78% at 100 000 hours



Accessories not included

	Wire guard		Bird guard		Motion sensor
TLCAWG		TLCABGBK		HD015VCRH	
	Remote control setting for motion sensor		White fixing aluminum plate 18" x 18"		White fixing aluminum plate 26" x 26"
HD06R		TLCAMP18WH		TLCAMP26WH	

Product description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Lightweight lamp body for easier installation in high ceiling areas.
- Smooth surface structure prevents accumulation of water, dust and insects.
- Optional motion sensor.
- Remote control for motion sensor optional.
- Big energy saving compared to conventional lights with similar lumen output.

Applications:

Garages, gas stations, lean-to, stairwells, etc.