
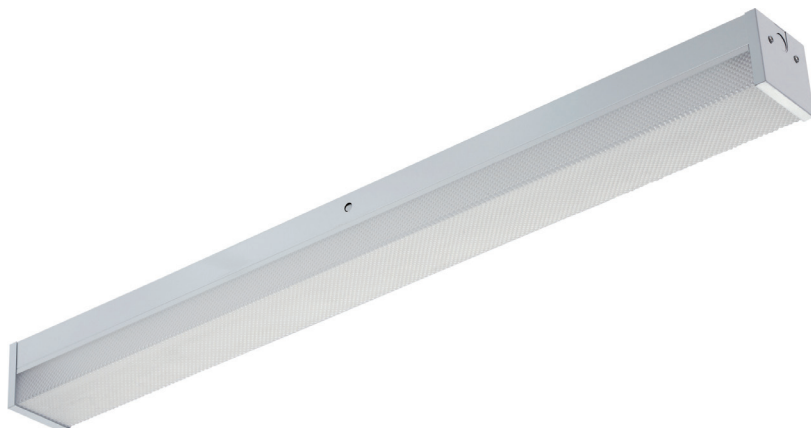


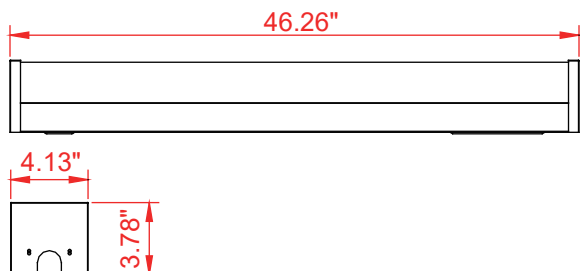

Specifications TLCBUS4P40AWH

Electrical Specifications

Model No.	TLCBUS4P40AWH
DLC ID	N/D
Power (W) selectable $\pm 10\%$	25W / 30W / 40W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy $\pm 3\%$	130 lm/W
Power Factor (PF)	>0.9
Surge protection	2 Kv
Total harmonic distortion	<20%
Dimmable	0-10V

Photometric Specifications

CRI	>80
CCT selectable	3500K / 4000K / 5000K
Beam angle	120°
Light Output $\pm 3\%$	25W: 3 250 lm 30W: 3 900 lm 40W: 5 200 lm

Mechanical Specifications

IP Rating	Damp locations, IP20
Material	Steel + Acrylic
Lens	Prismatic
Net Weight	1.8 kg
Product size (mm)	$\pm 1\,175 \times 105 \times 96$ mm
Product size (inch)	$\pm 46.26" \times 4.13" \times 3.78"$
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 45°C
Lifespan (L70)	54 000 hours

Product description:

- Wide supply voltage supply range 120-347 V.
- Selectable power and CCT.
- Its versatile design makes installation easy which reduces installation time and costs.
- Savings on energy consumption compared to conventional lighting.
- Warranty: 5 years.
- Compatible with most sensors.
- Ceiling or wall installation.

Applications:

Suitable for schools, hospitals, supermarkets, offices, warehouses, stairwells, bathrooms, etc.



HD027VCR
Motion sensor