




Installation hole: Ø3 7/8" (Ø98 mm)

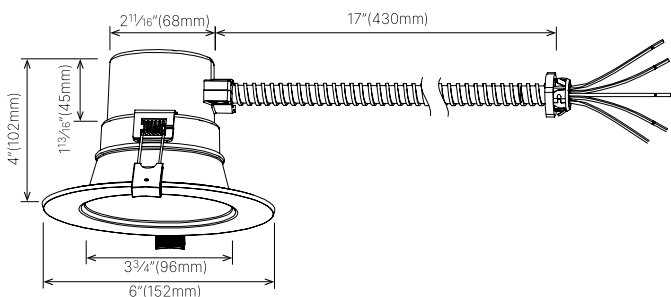

Electrical specifications	
Model no.	TLCDLUS4R15FRAWH
DLC ID	-
Power ±10%	6W / 8W / 10W / 12W / 15W
Input voltage	AC120-347V
Frequency	50/60 Hz
Efficacy ±3%	90 lm/W
Power factor	>0.9
Dimmable	0-10 V
Surge protection	2.5 kv
Total harmonic distortion	<20%

Photometric specifications	
CRI	90
CCT	2700K / 3000K / 3500K / 4000K / 5000K
Beam angle	80°
Light output ±3%	6W: 540 lm   12W: 1080 lm
	8W: 720 lm   15W: 1350 lm
	10W: 900 lm






Mechanical specifications	
IP rating	Wet locations
Material	Metal
Lens	Polycarbonate
Net weight	0.44 kg
Product dimensions	± Ø6" x 4"
	± Ø152 mm x 102 mm
Operating humidity	5% ~ 90%
Operating temperature	-20°C ~ 40°C
Lumen maintenance	≈78.94% at 100 000 hours

#### Product description:

- 4" commercial recessed light fixture (6" Overall)
- Meets the following standards:
  - UL 1598
  - UL 263
  - CSA C22.2 No. 250.0
- Type IC.
- 2 hours fire resistance.
- Selectable CCT and power.
- Color: white.

#### Applications:

Houses, offices, schools, shopping centers, bathrooms, laundry rooms, porches, etc.

Optional accessories		
 <p><b>TLCDLR4RBK</b> Black finish 4"</p>	 <p><b>TLCDLR4RAL</b> Silver finish 4"</p>	 <p><b>TLCDLR4RSP</b> Specular finish 4"</p>
 <p><b>TLMP4</b> 4" installation plate</p>	 <p><b>TLMP36HB</b> 3" to 6" installation plate + fixing bars</p>	