


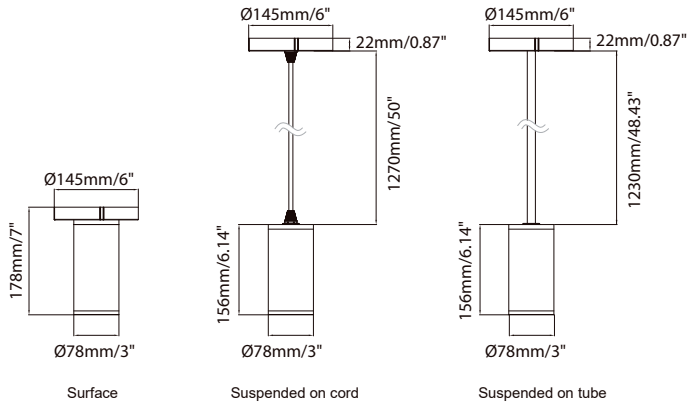

Specifications TLCYS3R10D40AWH

Electrical specifications

Model No.	TLCYS3R10D40AWH
Power (W) ± 10%	6 W / 8 W / 10 W
Input Voltage (V)	AC 120-277V, 50/60Hz
Efficacy ± 3%	90 lm/W
Power Factor (PF)	>0.9
Dimmable	0-10V

Photometric specifications

CRI	>90
CCT	3000K / 4000K / 5000K
Beam angle	40°
Light Output ± 3%	6W: 540 lm 8W: 720 lm 10W: 900 lm

Mechanical specifications

IP Rating	IP65
Material	Aluminum
Lens	Glass
Net Weight	N/A
Product size (mm)	±Ø 78 x 178 mm
Product size (inch)	±Ø 3" x 7"
Operating humidity	10% - 90%
Operating temperature	-40°C ~ 45°C
Lumen maintenance	>75% at 100 000 hours

Product description:

- Cylindrical luminaire.
- Selectable CCT and power.
- Choice of 25° or 60° lens option.
- Installation: on the surface or suspended on cord or tube.
- Tool-less twist-off cap.

Applications:

Commercial or residential indoor lighting.

Optional accessories

		
25° lens TLCY3R25	60° lens TLCY3R60	Tube for suspended mount TLCY1PSWH