



Specifications TLDEUS45AD

Electrical Specifications


Model no.	TLDEUS45AD
Power (W) ± 10%	25 W / 35 W / 45 W
Input voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	100 lm/W
Power factor (PF)	>0.9
Dimmable	0-10V

Photometric Specifications

CRI	90	
CCT	2700K / 3000K / 3500K / 4000K / 5000K	
Beam angle	100°	
Light output ± 3%	25W: 2500 lm	35W: 3500 lm
	45W: 4500 lm	

Mechanical Specifications

IP rating	Wet locations
Material	Aluminum
Lens	Polycarbonate
Net weight	N/A
Product size (mm)	See the drawings
Product size (inch)	See the drawings
Operating humidity	10% - 90%
Operating temperature	-20°C ~ 45°C
Lumen maintenance	N/A

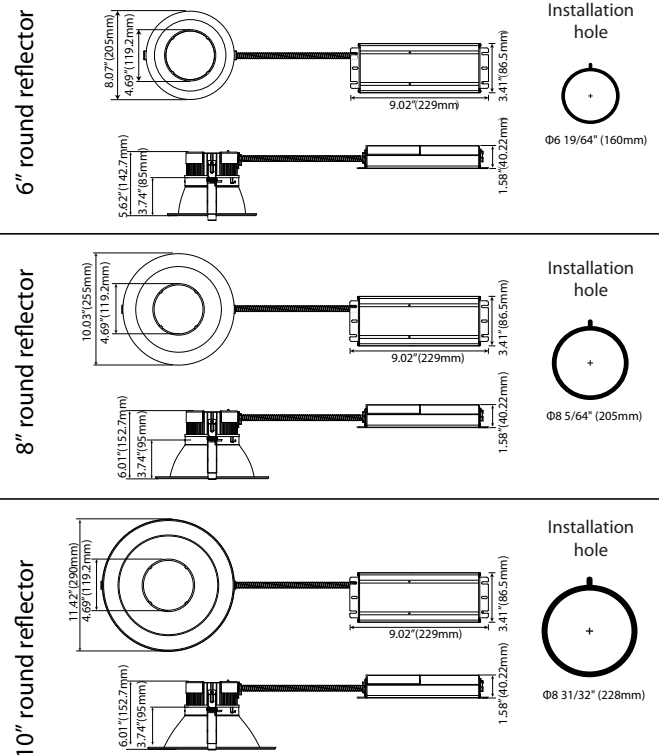

Product Description:

- Commercial recessed light.
- Selectable power and CCT.
- Choice of round, semi-specular reflector with white or black trim.

Applications:

Shopping centers, residential buildings, hotels, schools, houses, etc.

Optional accessories

