


Explosion proof

140mm[5.51"]

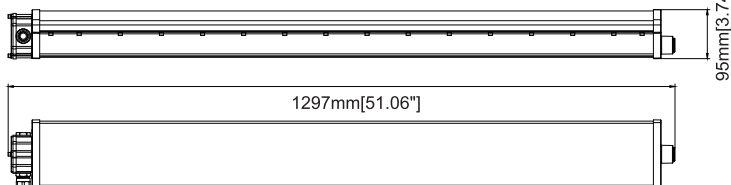

Specifications TLEL4F60D120P

Electrical specifications

| | |
|-------------------|---------------------|
| Model No. | TLEL4F60D120P |
| Power (W) ± 10% | 60 W |
| Input Voltage (V) | AC100-277V, 50/60Hz |
| Efficacy ± 3% | 130 lm/W |
| Power Factor (PF) | 0.9 |
| Surge protection | N/D |

Photometric specifications

| | |
|-------------------|----------|
| CRI | ≥70 |
| CCT | 5 000 K |
| Beam angle | 120° |
| Light Output ± 3% | 7 800 lm |
| Dimmable | 0-10 V |

Mechanical specifications

| | |
|-----------------------|--------------------------|
| IP Rating | IP66 |
| Material | Aluminum + PC |
| Lens | Clear |
| Net Weight | 8.03 kg |
| Product size (mm) | ± 1 297 x 140 x 95 mm |
| Product size (inch) | ± 51.06" x 5.51" x 3.74" |
| Operating Humidity | N/D |
| Operating Temperature | -40°C ~ 55°C |
| Lifespan (L70) | >150 000 hours |

Product description:

- UL-844 Dangerous places
CAN / CSA-C22.2 NO. 137
CLASS I DIV 2 GROUP A, B, C, D
CLASS II DIV 1 GROUP E, F, G
CLASS II DIV 2 GROUP F, G
CLASS III
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Gray.

Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.
Designed for wet locations.
Indoor and outdoor.

Mounting options

