



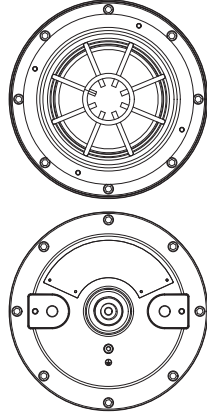


Low bay explosion proof

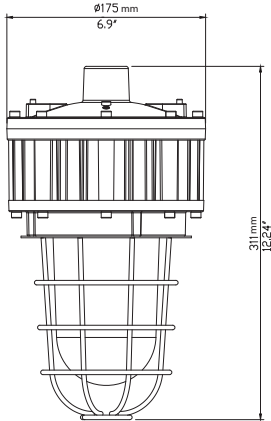

Accessories (not included)

 EX-HD51-KB1-3/4NPT Junction box	 EX-HD51-KYD-90-3/4NPT 90° bracket	 EX-HD51-KYD-45-3/4NPT 45° bracket
--	--	--



Specifications TLEP40P

Electrical specifications

Model No.	TLEP40P
Power (W) ± 10%	40 W
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy ± 3%	140 lm/W
Power Factor (PF)	0.9
Total harmonic distortion	<20%
Surge protection	10 Kv

Photometric specifications

CRI	>80
CCT	5 000 K
Beam angle	120°
Light Output ± 3%	5 600 lm

Mechanical specifications

IP Rating	IP66
Material	Aluminum
Lens	Clear (Tempered glass)
Net Weight	4.65 kg
Product size (mm)	Ø175 x 311 mm
Product size (inch)	Ø6.9 x 12.24 in
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 65°C

Product description:

- UL 844:
 CLASS 1 - DIVISION 1 - GROUP C, D
 CLASS 1 - DIVISION 2 - GROUP A, B, C, D
 CLASS 2 - DIVISION 1 - GROUP E, F, G
 CLASS 2 - DIVISION 2 - GROUP F, G
 CLASS 3
- Marking marine: UL1598A / UL1598 / UL844.
- Save up to 70% on electricity consumption compared to HPS/MH lighting fixture.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Gray.
- 3/4" NPT.

Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.

Designed for wet locations.
 Indoor and outdoor.