

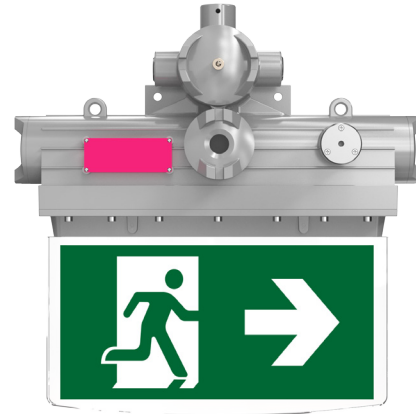


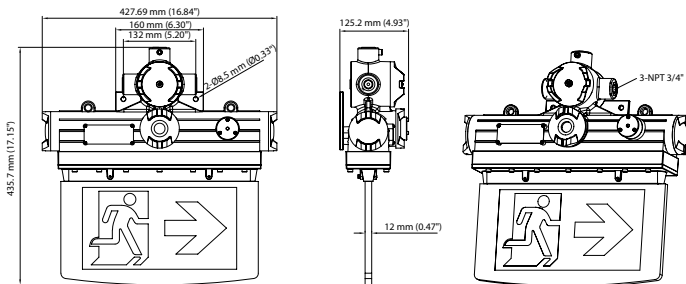

Electrical specifications	
Model no.	TLEPEF501
Consumption (W) $\pm 10\%$	10W
Emergency consumption (W) $\pm 10\%$	5W
Remote capacity	No
Input voltage	120-277V, 50/60 Hz
Efficacy $\pm 3\%$	-
Power factor	-
Emergency duration	3 hours
Recharge time	24 hours
Operation mode	Maintained
Dimmable	No

Mechanical specifications	
IP rating	IP66
Material	Aluminum
Lens	Tempered glass
Net weight	6 kg / 13.23 lbs
Product dimensions	$\pm 16.84'' \times 17.15'' \times 4.93''$ $\pm 427.69 \times 435.7 \times 125.2 \text{ mm}$
Operating humidity	10% ~ 90%
Operating temperature	0°C ~ 40°C
Battery	-
Lumen maintenance	-

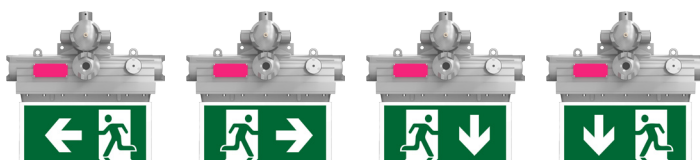

Product description:

- Compliant with standards:
 - UL844
 - UL924
 - UL121201
 - CSA C22.2 NO. 137-18
 - CSA C22.2 NO. 141-15
 - CSA C22.2 NO. 213
 - CLASS I, DIVISION 1, GROUPS B, C, D
 - CLASS I, DIVISION 2, GROUPS A, B, C, D
 - CLASS II, DIVISION 1, GROUPS E, F, G
 - CLASS II, DIVISION 2, GROUPS F, G
 - CLASS III
- Pictogram options, see pictures.
- Supplied with 3/4"NPT conduit fittings.
- Can be wall-mounted, suspended from a tube, or suspended from cables.

Applications:

Explosion-proof emergency lighting.

Optional accessories		
 EX-HD51-KB1-3/4NPT Junction box	 EX-SP12 12" suspension tube	 EX-SR4 4' suspension cables