


## Explosion-proof

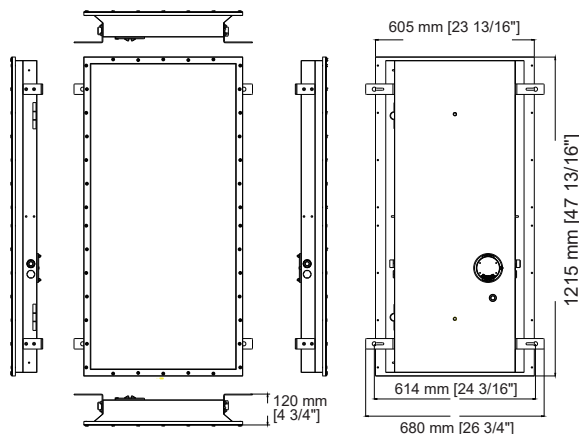

### Specifications TLEPS24C200HD120P

#### Electrical specifications

Model No.	TLEPS24C200HD120P
Power (W) $\pm 10\%$	200 W
Input Voltage (V)	AC200-480V, 50/60Hz
Efficacy $\pm 3\%$	130 lm/W
Power Factor (PF)	0.9
Surge protection	N/A

#### Photometric specifications

CRI	N/A
CCT	5 000 K
Beam angle	120°
Light Output $\pm 3\%$	26 000 lm
Dimmable	0-10 V

#### Mechanical specifications

IP Rating	IP66 / IK10
Material	Stainless steel
Lens	Polycarbonate
Net Weight	30 kg
Product size (mm)	$\pm 605 \times 1\,215 \times 120$ mm
Product size (inch)	$\pm 23.8" \times 47.8" \times 4.7"$
Operating Humidity	N/A
Operating Temperature	-40°C ~ 60°C
Lifespan (L70)	>150 000 hours

### Product description:

- UL-844 Hazardous locations  
CAN / CSA-C22.2 NO. 137  
CLASS 1 - DIVISION 2 - GROUP A, B, C, D  
CLASS 2 - ZONE 2 - GROUP IIA, IIB, IIC
- Installation: surface or suspended.
- Impact-resistant. (IK10)
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: white.

### Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.  
Designed for wet locations.  
Indoor and outdoor.