


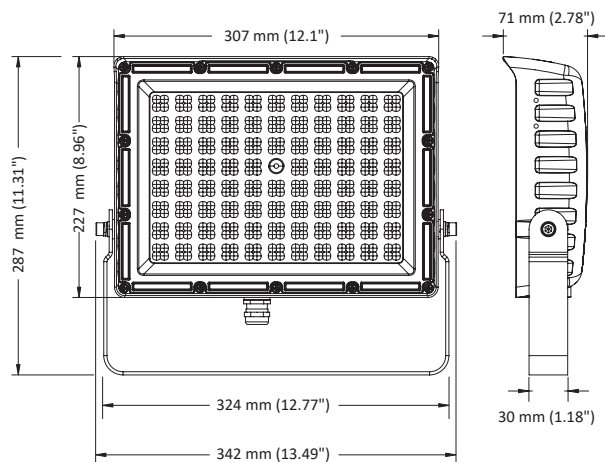

Electrical specifications

Model no.	TLFLUS150TU3ABK
DLC ID	-
Power $\pm 10\%$	80W / 120W / 150W
Input voltage	120-347 V
Frequency	50/60 Hz
Efficacy $\pm 10\%$	145 lm/W (at 4000K)
Power factor	>0.9
Dimmable	0-10 V
Surge protection	L-N:6KV, L/N-PE:6KV
Total harmonic distortion	$\leq 20\%$ Full load

Photometric specifications

CRI	≥ 80
CCT	3000K / 4000K / 5000K
Beam angle	NEMA 5x5 / 6x6 / 7x7
Light output	80W: 11 600 lm 120W: 17 400 lm 150W: 21 750 lm

Mechanical specifications

IP rating	IP66
Material	Aluminum
Lens	Polycarbonate
Net weight	2.6 kg
Product dimensions	$\pm 13.49'' \times 11.31'' \times 2.78''$ $\pm 342 \times 287 \times 71$ mm
Operating humidity	0% ~ 95%
Operating temperature	-40°C ~ 50°C
Lumen maintenance	-

Product description:

- Bracket: TU («U» bracket)
- Mounting option available. (SW)
- Built with materials that have low thermal expansion. Stays waterproof down to -40°C.
- Saves on electricity consumption compared to standard lighting fixture.
- Color: black.
- Warranty: 5 Years.
- 24" power cord.

Applications:

Designed for use in wet locations.
Flood light luminaire.

Optional accessory



TLFLSWBK

«Knuckle» bracket