


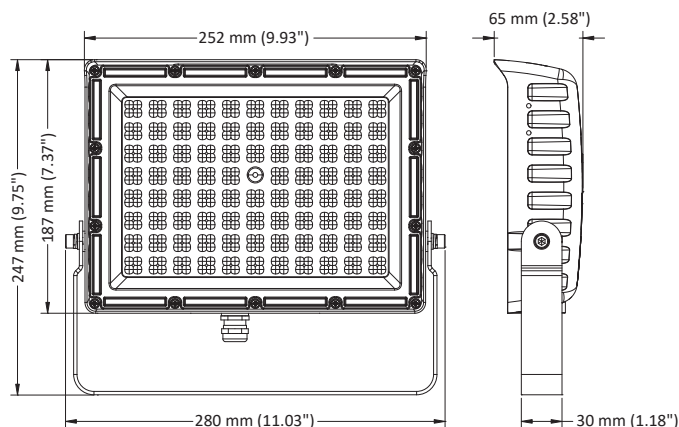

Specifications TLFLUS60TU2ABK

Electrical Specifications

Model No.	TLFLUS60TU2ABK
DLC ID	N/D
Power (W) $\pm 10\%$	40W / 50W / 60W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy $\pm 3\%$	145 lm/W
Power Factor (PF)	0.9
Total harmonic distortion	N/A
Surge protection	L-N:4KV, L/N-PE:6KV
Dimmable	0-10 V

Photometric Specifications

CRI	≥ 70
CCT selectable	3000K / 4000K / 5000K
Angle selectable	NEMA 5x5 / 6x6 / 7x7
Light Output $\pm 3\%$	40W: 5 800 lm 50W: 7 250 lm 60W: 8 700 lm

Mechanical Specifications

IP Rating	IP66
Material	Die cast aluminum
Lens	Polycarbonate
Net Weight	2.2 kg
Product size (mm)	$\pm 280 \times 247 \times 65$ mm
Product size (inch)	$\pm 11.03" \times 9.75" \times 2.58"$
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 50°C
Lifespan	$\geq 60\,000$ hours

Product Description:

- Bracket: TU ("U" bracket)
- Mounting option available. (SW)
- Built with materials that have low thermal expansion. Stays waterproof down to -40°C.
- Saves on electricity consumption compared to standard lighting fixture.
- Color: black.
- Warranty: 5 Years.
- 24" power cord.

Applications:

Designed for use in wet locations.
Flood luminaire.

Optional accessory

