
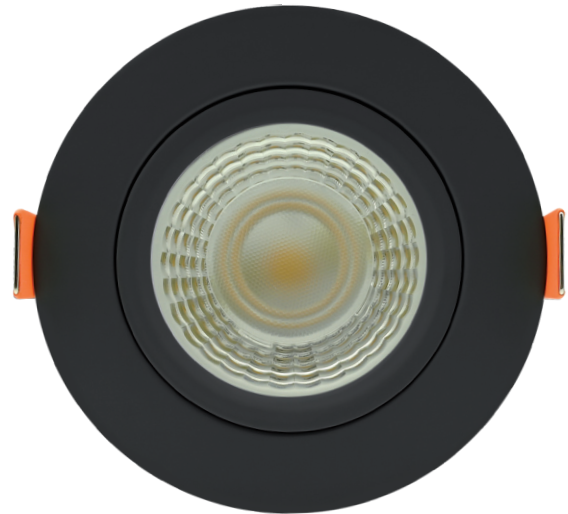


Gimbal LED recessed light

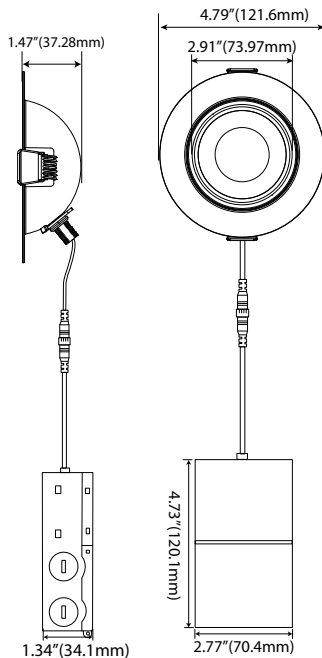

Specifications TLGDL4R9ABK

Electrical Specifications

Model No.	TLGDL4R9ABK
Power (W) ± 10%	9 W
Input Voltage (V)	AC120 V, 60Hz
Efficacy ± 3%	85 lm/W
Power Factor (PF)	>0.9
Dimmable	Triac

Photometric Specifications

CRI	90
CCT	Selectable
Beam angle	36°
Light Output ± 3%	765 lm

Mechanical Specifications

IP Rating	Damp locations
Material	Aluminum + Metal box
Lens	Frosted (Polycarbonate)
Net Weight	N/A
Product size (mm)	± Ø121.6 x 37.28 mm
Product size (inch)	± Ø4.79" x 1.47"
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 45°C
Lumen maintenance	>73% at 100 000 hours


Product Description:

- 4" recessed down light.
- Adjustable light direction (up to 90°).
- Type IC.
- Airtight according to ASTM E283-04.
- Junction box with quick connector included.
- 5 CCT: selectable 2 700 K, 3 000 K, 3 500 K, 4 000 K and 5 000 K using a switch.
- No toxic chemicals, RoHS compliant.
- Color: black.
- Optional installation plate.


Applications:

Houses, schools, shopping centers, etc.

Installation plates and fixing bars optional

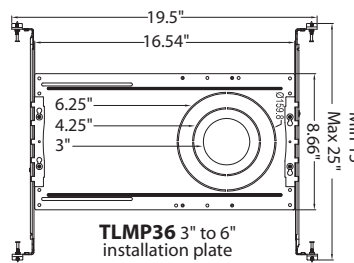

TLMP36 3" to 6" installation plate
+
TLMPHB Fixing bars
(Sold separately)



TLMP4 4" installation plate

info@technilight.ca