
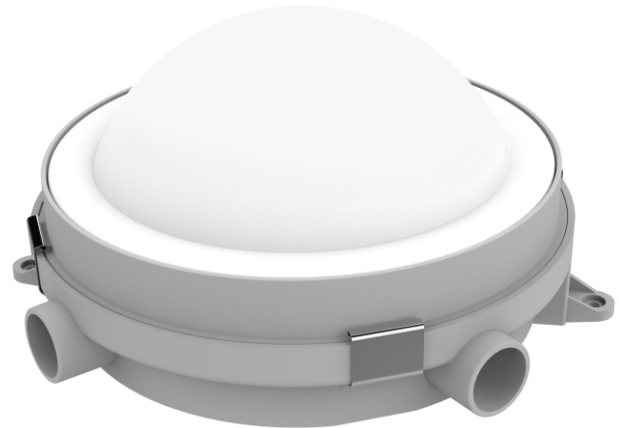


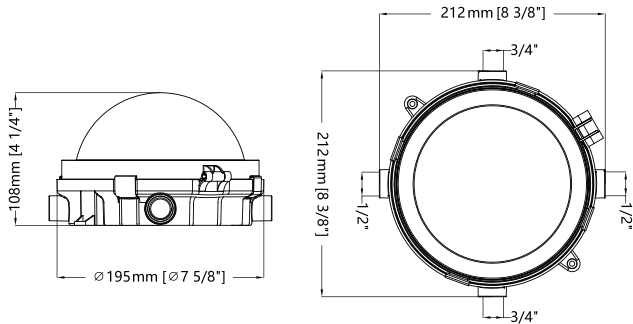

Specifications TLGMS32AD

Electrical specifications

Model No.	TLGMS32AD
Power (W) $\pm 10\%$	16W / 22W / 32W
Input Voltage (V)	AC120-277V, 50/60Hz
Efficacy $\pm 3\%$	157 lm/W
Power Factor	>0.9
Dimmable	Triac

Photometric specifications

CRI	>80
CCT	2700K / 4000K / 5000K
Beam angle	N/A
Light Output $\pm 3\%$	16W: 2 512 lm
	22W: 3 454 lm
	32W: 5 024 lm

Mechanical specifications

IP rating	IP66 / IK08
Material	Polycarbonate
Lens	Frosted (Polycarbonate)
Net weight	N/A
Product size (mm)	$\pm \varnothing 195 \times 108$ mm
Product size (in)	$\pm \varnothing 7.63" \times 4.25"$
Operating humidity	N/A
Operating temperature	-20°C ~ 40°C
Lumen maintenance	N/A

Product description:

- Airtight and waterproof.
- Selectable CCT and power.
- Housing with mounting bracket and hinge for easy installation.
- Plastic housing and aluminum heatsink.
- PVC pipe inlets: 2 x 1/2" and 2 x 3/4"

Applications:

Storage space, garage, barn, shed, any type of farm, underground parking, etc.