
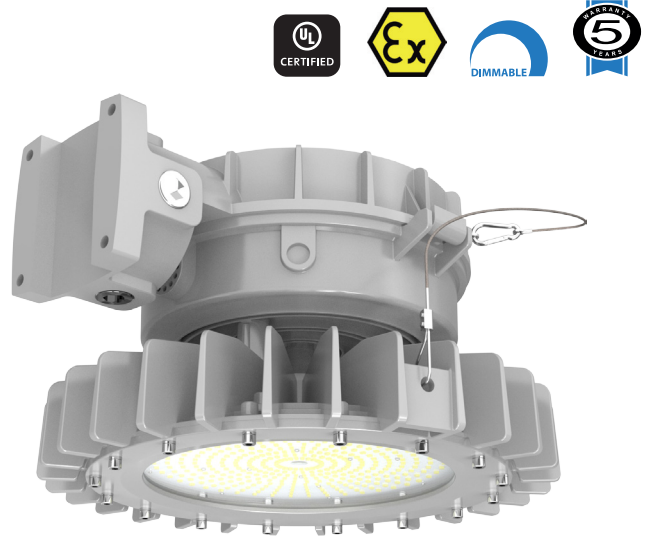


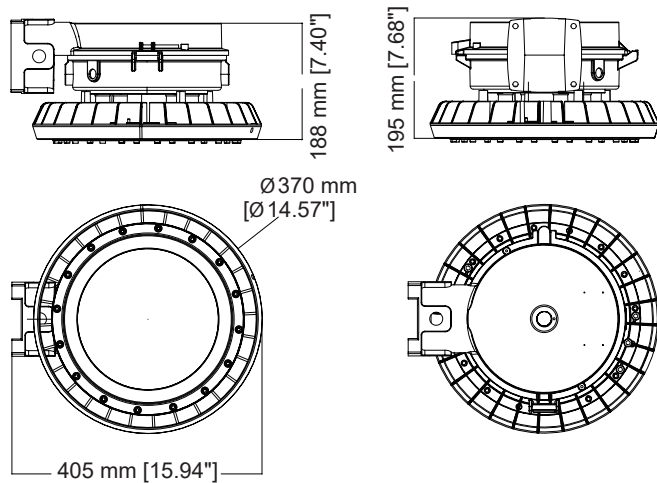

| Electrical specifications |                   |
|---------------------------|-------------------|
| Model no.                 | TLHBEU3C150D120PC |
| DLC ID                    | -                 |
| Power $\pm 10\%$          | 150 W             |
| Input voltage             | AC120-347V        |
| Frequency                 | 50/60 Hz          |
| Efficacy $\pm 10\%$       | 130 lm/W          |
| Power factor              | >0.9              |
| Dimmable                  | 0-10 V            |
| Surge protection          | 10 kv             |
| Total harmonic distortion | <15%              |

### Product description:

- CLASS 1 - DIVISION 2 - GROUP A, B, C, D
- Saves up to 70% on energy consumption compared to HPS/MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Bracket: gray.
- Wall mounting bracket.

### Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.  
Designed for wet locations.  
Indoor and outdoor.

| Photometric specifications |           |
|----------------------------|-----------|
| CRI                        | >80       |
| CCT                        | 5000 K    |
| Beam angle                 | 120°      |
| Light output $\pm 10\%$    | 19 500 lm |

| Mechanical specifications |                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------|
| IP rating                 | IP66 / IK08                                                                               |
| Material                  | Aluminum                                                                                  |
| Lens                      | Clear tempered glass                                                                      |
| Net weight                | 9.2 kg                                                                                    |
| Product dimensions        | $\pm \text{Ø}14.57'' \times 7.40''$<br>$\pm \text{Ø}370 \text{ mm} \times 188 \text{ mm}$ |
| Operating humidity        | 10% ~ 90%                                                                                 |
| Operating temperature     | -40°C ~ 50°C                                                                              |
| Lumen maintenance         | -                                                                                         |

| Compatible with covers        |         |      |           |            |
|-------------------------------|---------|------|-----------|------------|
| Eaton's Crouse-Hinds - Champ® |         |      |           |            |
| Pendant                       | Ceiling | Wall | Stanchion | Quad mount |
| APM2                          | CM2     | TWM2 | JM5       | QM25       |
| AMP3                          | CM3     | TWM3 | PM5       |            |
| HPM2                          |         |      |           |            |