

Electrical specifications	
Model no.	TLHBHUS200A
DLC ID	-
Power $\pm 10\%$	100W / 150W / 200W
Input voltage	AC120-347V
Frequency	50/60 Hz
Efficacy $\pm 3\%$	170 lm/W
Power factor	>0.95
Dimmable	No
Surge protection	6 kv
Total harmonic distortion	$\leq 20\%$


Product description:

- Selectable CCT and power.
- Operates in ambient temperatures up to 75°C.
- Corrosion and high-temperature resistant finish.
- 500-hour salt spray corrosion resistance test.

Applications:

Industrial facilities, exhibition centers, shopping centers, gymnasiums, mining plants, steel mills, warehouses, airports, etc.

Photometric specifications	
CRI	>70
CCT	3000K / 4000K / 5000K
Beam angle	110°
Light output $\pm 3\%$	100W: 17 000 lm
	150W: 25 500 lm
	200W: 34 000 lm

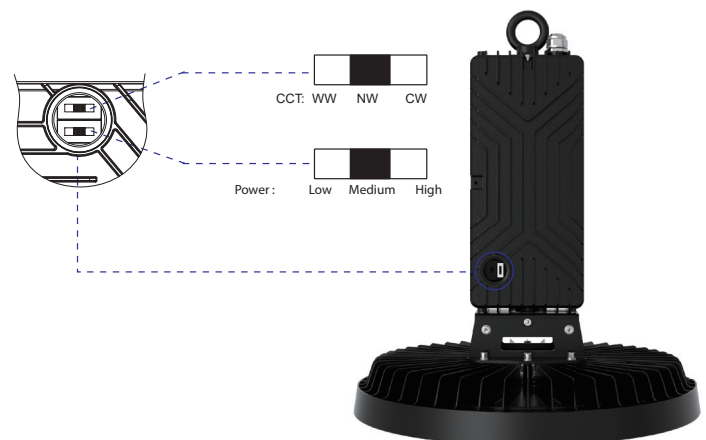

Mechanical specifications	
IP rating	IP66
Material	Die cast aluminum
Lens	Glass
Net weight	9.7 kg
Product dimensions	$\pm \text{Ø}19.27'' \times 17.80'' \times 3.15''$
	$\pm \text{Ø}489.5 \times 452 \times 80 \text{ mm}$
Operating humidity	5% ~ 95%
Operating temperature	-20°C ~ 75°C
Lumen maintenance	-

Optional accessory



TLHBHUSTU
"U" bracket