


## Indoor high bay

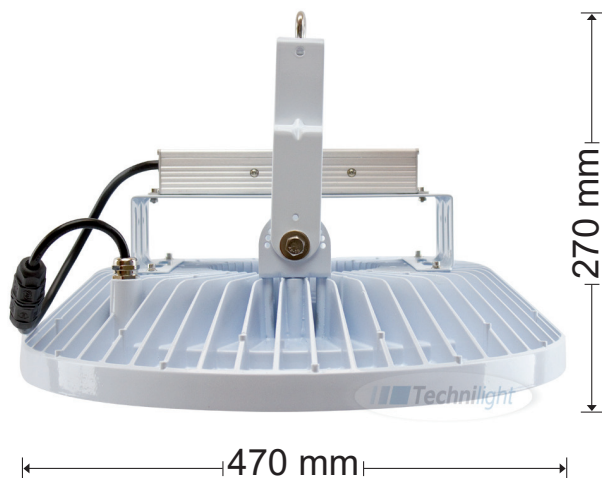

### Specifications TLHBRC400V2P

#### Electrical Specifications

Model No.	TLHBRC400V2P
DLC ID	PQ7RQCD3
Power (W) ± 10%	400 W (DLC: 417.9 W)
Input Voltage (V)	AC200-480V, 50/60Hz
Efficacy ± 3%	135.46 lm/W
Power Factor (PF)	0.935
Surge protection	2 kV
Total harmonic distortion	<15%

#### Photometric Specifications

CRI	81
CCT	5000 K
Beam angle	100°
Light Output ± 3%	56 609 lm
Dimmable	1-10V

#### Mechanical Specifications

IP Rating	IP66
Material	Magnesium Alloy
Lens	Clear (Tempered glass )
Net Weight	10 kg
Product size (mm)	Ø470 x 270 mm
Product size (inch)	± Ø18-1/2 x 10-5/8"
Operating Temperature	-35°C ~ 45°C
Lumen maintenance	>77% at 100 000 hours

### Product Description:

- Lightweight lamp body for easier installation in high ceiling areas.
- Acid and alkaline resistant tempered glass lens.
- Stainless steel suspension kit 500 mm. Mounting on ceiling, wall or suspended.
- Each lamp are with 1m power cable.
- Other CCT and frost lens available on special request.
- Over 70% energy savings compared to conventional lights with similar lumen output.
- Resistance to impact.
- Magnesium alloy material with multiple perforation design for maximum thermal conductivity to ensure extended lifetime.

### Applications:

Warehouse, workshop, garage, industry, arena and other high ceiling areas.  
Indoor.