


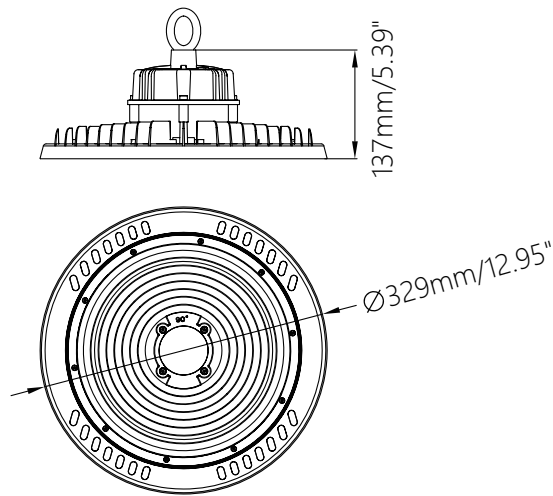

Product description:

- Selectable power and color temperature.
- Die-cast aluminum material and finned design for faster heat dissipation.
- Significant energy savings compared to conventional lighting with similar light output.
- 2' stainless steel pendant kit included.
- 6' power cord.

Applications:

Warehouse, workshop, garage, industry, arena and other high ceiling areas.

Electrical specifications

Model no.	TLHBUS240A120
DLC ID	-
Power $\pm 10\%$	150W / 200W / 240W
Input voltage	120-347 V
Frequency	50/60 Hz
Efficacy $\pm 3\%$	150 lm/W
Power factor	>0.95
Dimmable	0-10 V
Surge protection	6 kv
Total harmonic distortion	<15%

Photometric specifications

CRI	>80
CCT	3000K / 4000K / 5000K
Beam angle	120°
Light output $\pm 3\%$	36 000 lm

Mechanical specifications

IP rating	IP65 / IK08
Material	Aluminum
Lens	Clear polycarbonate
Net weight	2.1 kg
Product dimensions	$\pm \varnothing 12.95'' \times 5.39''$ $\pm \varnothing 329 \text{ mm} \times 137 \text{ mm}$
Operating humidity	5% ~ 95%
Operating temperature	-40°C ~ 45°C
Lumen maintenance	-

Optional accessory



BLD-RM60R

Emergency lighting battery
for high bay luminaires
 $\leq 300\text{W}$