




TLLAU300T4BBK IP65 / NEMA 4X

Parking and wide area

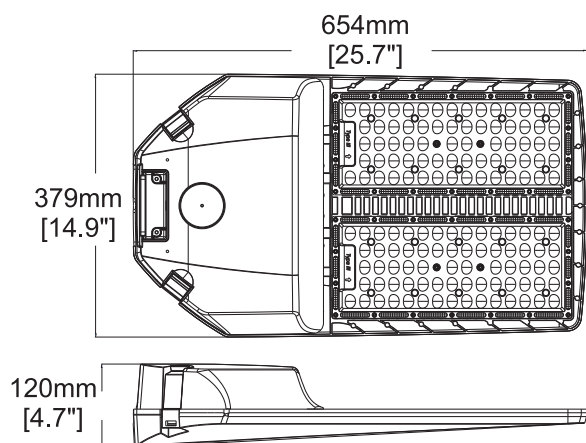

Specifications TLLAU300T4BBK

Electrical Specifications

Model No.	TLLAU300T4BBK
DLC ID	N/A
Power (W) $\pm 10\%$	300 W
Input Voltage (V)	120-347V, 50/60Hz
Efficacy $\pm 3\%$	110 lm/W
Power Factor (PF)	0.932
Dimmable	0-10V
Replace MH/HPS	750 W
Surge protection	6 kv
Total harmonic distortion	$\leq 15\%$

Photometric Specifications

CRI	≥ 70
CCT	2 200 K
Beam angle	Type IV Medium
Light Output $\pm 3\%$	33 000 lm
BUG rating	B3-U0-G5

Mechanical Specifications

IP Rating	IP65 / NEMA 4X
Material	Aluminum
Lens	PC
Net Weight	10.1 kg
Product size (mm)	$\pm 654 \times 379 \times 120$ mm
Product size (inch)	$\pm 25.7 \times 14.9 \times 4.7$ in
EPA	2.95 ft ²
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 45°C
Lumen maintenance	N/A

Optional accessories available



Product Description:

- Light and slim housing.
- Optional photocell. Installation on top of the luminaire. Drilling required.
- Optional motion sensor.
- Easily replace traditional MH or HPS luminaire fixture.
- Powerful light efficacy.
- Save in electricity consumption compared to fluorescent lighting fixture.
- Other CCT available on special request.
- Color: Black.
Other colors available on special request.
- Warranty: 5 Years.

Applications:

Outdoor parking and wide area.

info@technilight.ca

WWW.TECHNILIGHT.CA