



Specifications TLLSUS4F50AD

Electrical Specifications

Model No.	TLLSUS4F50AD
DLC ID	N/A
Power (W) selectable $\pm 10\%$	30W / 40W / 50W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy $\pm 3\%$	130 lm/W
Power Factor (PF)	>0.9
Surge protection	N/A
Total harmonic distortion	N/A

Photometric Specifications

CRI	≥ 80
CCT selectable	3500K / 4000K / 5000K
Beam angle	120°
Light Output $\pm 3\%$	30W: 3900 lm
	40W: 5200 lm
Dimmable	50W: 6500 lm
	0-10V

Mechanical Specifications

IP Rating	IP20
Material	Steel + PC
Lens	Frosted
Net Weight	N/A
Product size (mm)	$\pm 1219 \times 76 \times 68$ mm
Product size (inch)	$\pm 47.99" \times 3" \times 2.68"$
Operating Humidity	10% - 90%
Operating Temperature	-25°C ~ 40°C
Lifespan (L70)	N/A


Product Description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Easy Installation with fast connection design, shorten the installation process and save labor cost.
- Save up in electricity consumption compared to fluorescent lighting fixture.
- Warranty: 5 years.
- It could be fitted with sensor.
- Ceiling installation or optional suspension kit, not included.
- Optional protective grid, not included.

Applications:

Suitable for houses, basements, warehouses, garages, shops, etc.

Optional accessory

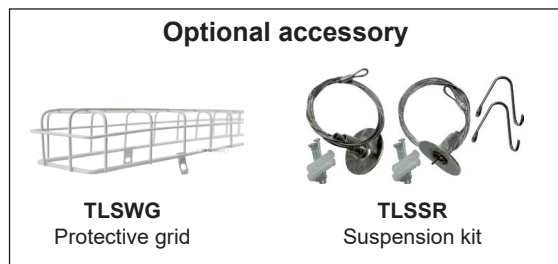

TLSWG
Protective grid

TLSSR
Suspension kit