

Specifications TLMDEUS22AD

Electrical Specifications

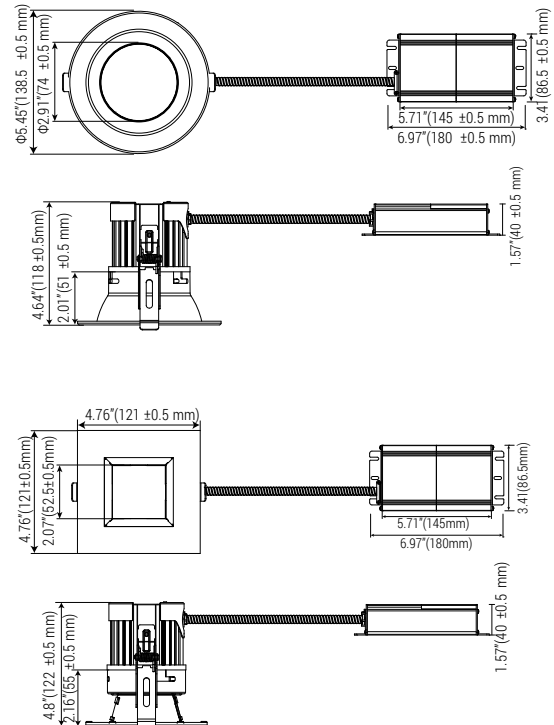
Model no.	TLMDEUS22AD
Power (W) $\pm 10\%$	12 W / 17 W / 22 W
Input voltage (V)	AC 120-347V, 50/60Hz
Efficacy $\pm 3\%$	100 lm/W
Power factor (PF)	>0.9
Dimmable	0-10V

Photometric Specifications

CRI	90
CCT	2700K / 3000K / 3500K / 4000K / 5000K
Beam angle	Round: 85° / Square: 80°
Light output $\pm 3\%$	12W: 1200 lm 17W: 1700 lm 22W: 2200 lm

Mechanical Specifications

IP rating	Wet locations
Material	Aluminum
Lens	Polycarbonate
Net weight	N/A
Product size (mm)	See the drawings
Product size (inch)	See the drawings
Operating humidity	10% - 90%
Operating temperature	-20°C ~ 45°C
Lumen maintenance	N/A





Product Description:

- 4" commercial recessed light.
- 110 mm (4"21/64) hole required for installation.
- Selectable power and CCT.
- Choice of square or round, semi-specular reflector with white or black trim.

Applications:

Shopping centers, residential buildings, hotels, schools, houses, etc.

Optional accessories

 4" white round reflector TLMDER4RWH	 4" white square reflector TLMDER4SWH	 Installation plate 3" to 6" TLMP36	 4" Installation plate TLMP4
 4" black round reflector TLMDER4RBK	 4" black square reflector TLMDER4SBK	 Set of fixing bars (2 pcs) TLMPHB	