


Product description:

- Selectable power.
- Robust and durable design.
- Optimized thermal system, ensuring stable lighting and extended lifespan.
- Available in multiple beam angles for narrow projection.
- Energy savings compared to traditional lighting.
- Warranty: 5 years.

Applications:

Flood light.
Stadiums, racetracks, sports fields, large parking lots, construction sites, etc.

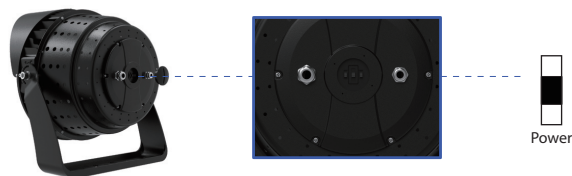

Electrical specifications	
Model no.	TLSPUS100030PBK
DLC ID	-
Power $\pm 10\%$	720W / 800W / 1000W
Input voltage	120-347 V
Frequency	50/60 Hz
Efficacy $\pm 3\%$	165 lm/W / 160 lm/W / 155 lm/W
Power factor	0.95
Dimmable	0-10 V
Surge protection	10 Kv
Total harmonic distortion	<20%

Photometric specifications	
CRI	>70
CCT	5000 K
Beam angle	30°
Light output $\pm 3\%$	720W: 118 800 lm
	800W: 128 000 lm
	1000W: 155 000 lm

Mechanical specifications	
IP rating	IP66 / IK09
Material	Die cast aluminum
Lens	Clear polycarbonate
Net weight	32.19 kg
Product dimensions	$\pm 21.2'' \times 21.7'' \times 21.2''$
	$\pm 539 \text{ mm} \times 551 \text{ mm} \times 540 \text{ mm}$
Operating humidity	10% ~ 95%
Operating temperature	-40°C ~ 45°C
Lumen maintenance	-

Optional accessories	
 <p>TLSPSFBK "Slip fitter" bracket</p>	 <p>TLSPPLAD Laser aiming</p>