




RoHS

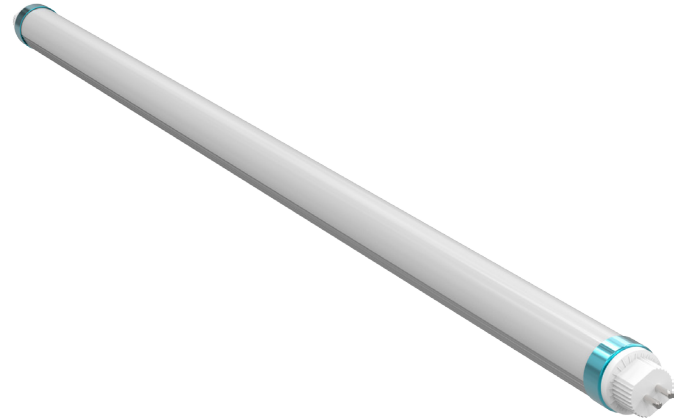

Electrical specifications

Model no.	TLT5U4F24A
DLC ID	-
Power $\pm 10\%$	24W
Input voltage	120-347 V
Frequency	50/60 Hz
Efficacy $\pm 3\%$	160 lm/W
Power factor	>0.9
Dimmable	No
Surge protection	-
Total harmonic distortion	120VAC: <10% 347VAC: <25%

Photometric specifications

CRI	>80
CCT	3000K / 4000K / 5000K
Beam angle	140°
Light output $\pm 3\%$	3 840 lm

Mechanical specifications

IP rating	-
Material	Aluminum
Lens	Frosted polycarbonate
Net weight	0.35 kg
Product dimensions	$\pm \varnothing 0.9" \times 45.8"$ $\pm \varnothing 22.8 \text{ mm} \times 1163 \text{ mm}$
Operating humidity	-
Operating temperature	-20°C ~ 48°C
Lumen maintenance	80.89% at 100 000 hours

Product description:

- Suitable for enclosed fixtures.
- Selectable CCT.
- Ideal for replacing all T5 fluorescent lighting.
- Soft, even light. Glare-free and flicker-free.
- Significant energy savings compared to fluorescent lighting.
- "Type A and B". Ballasted or direct 120-347 VAC power supply.
- 5 year warranty.

Applications:

T5 fluorescent tubes replacement.

