

Specifications TLT8U4F16P

Electrical Specifications

Model No.	TLT8U4F16P
Power (W) ± 10%	16 W
Input Voltage (V)	AC100-347V, 50/60Hz
Efficacy	160 lm/W
Power Factor (PF)	>0.95

Photometric Specifications

CRI	>80
CCT	5 000 K
Beam angle	180°
Light Output	2 560 lm
Dimmable	No

Mechanical Specifications


Material	Aluminum + PC
Lens	Frosted
Product size (mm)	± 1 212 x 28.8 mm
Product size (inch)	± 47.72 x 1.10"
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 40°C

Product description:


- Aluminum and polycarbonate construction.
- Perfect replacement for the whole set of T8 and T12 fluorescent lighting fixture.
- Soft and uniform light. No glare and no flickering.
- Economy on electricity consumption compared to fluorescent lighting fixture.
- "UL Type A and B". With ballast and direct supply from 100 to 277 VAC.
- Warranty: 5 Years.
- 4 000 K available

Applications:

Fluorescent T8 and T12 tubes replacement.
Compatible with TLYH8G luminaire.

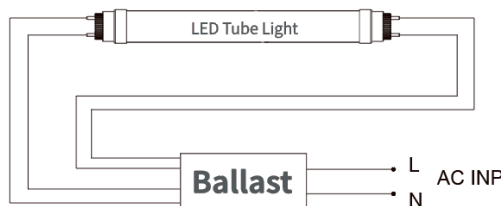

Double-ended input



Single-ended input

