


Recessed luminaire with night light mode



Optional accessories

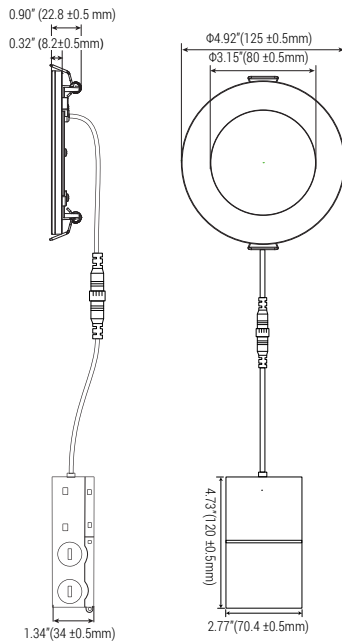

Specifications TLTDL4R9NRAWH

Electrical Specifications

Model no.	TLTDL4R9NRAWH
Power (W) ± 10%	9W
Input voltage (V)	AC120 V, 60Hz
Efficacy ± 3%	70 lm/W
Power Factor (PF)	>0.9
Dimmable	Triac

Photometric Specifications

CRI	≥90
CCT	2700K / 3000K / 3500K / 4000K / 5000K
Beam angle	120°
Light output ± 3%	630 lm

Mechanical Specifications

IP Rating	Wet locations
Material	Aluminum + PS
Lens	Frosted
Net Weight	N/A
Product size (mm)	± Ø125 x 8.2 mm
Product size (inch)	± Ø4.92" x 0.32"
Operating Humidity	10% ~ 90%
Operating Temperature	-20°C ~ 45°C
Lifespan (L70)	N/A

<p>TLMP36 3" to 6" installation plate + TLMPHB Fixing bars (sold separately)</p>	<p>TLMP4</p>	<p>4" installation plate</p>
--	--------------	------------------------------

Product description:

- Ultra thin 4" recessed down light.
- Night light mode with soft lighting for the night. (3W, 2000K).
- Type IC.
- Airtight.
- Junction box with quick connector included.
- Selectable CCT and power.
- Optional installation plate.
- Color: white.

Applications:

Houses, schools, shopping centers, etc.