

Specifications TLTDL6R15AWH

Electrical Specifications

Model No.	TLTDL6R15AWH
Power (W) ± 10%	15 W
Input Voltage (V)	AC120 V, 60Hz
Efficacy ± 3%	80 lm/W
Power Factor (PF)	>0.9
Dimmable	Triac

Photometric Specifications

CRI	>80
CCT	Selectable
Beam angle	120°
Light Output ± 3%	1 200 lm

Mechanical Specifications

IP Rating	IP20
Material	Aluminum + Steel box
Lens	Frosted (polycarbonate)
Net Weight	350 g
Product size (mm)	± Ø174.7 x 22 mm
Product size (inch)	± Ø6.85" x 0.87"
Operating Humidity	10% - 90%
Operating Temperature	-20°C~45°C
Lifespan (L70)	N/D


Product description:

- Ultra thin 6" recessed down light.
- Type IC.
- Airtight.
- Junction box with quick connector included.
- 5 CCT: selectable 2 700 K, 3 000 K, 3 500 K, 4 000 K and 5 000 K using a switch.
- Color: white.
- Optional installation plate.

Applications:

Houses, schools, shopping centers, etc.

Optional installation plate and fixing bars

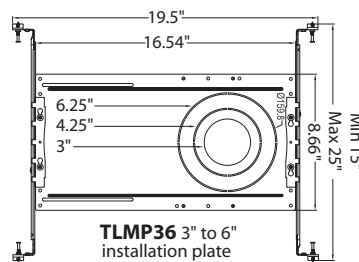

TLMP36 3" to 6" installation plate
+
TLMPHB Fixing bars
(sold separately)