
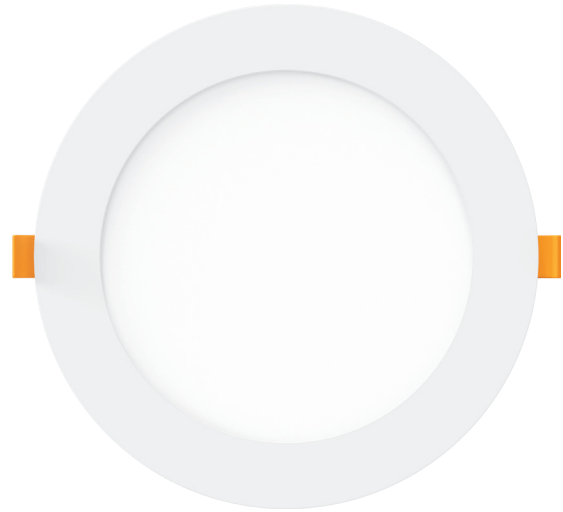


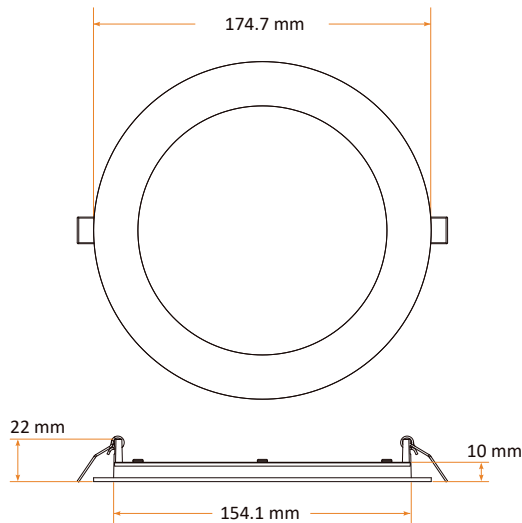

Specifications TLTDLD6R15AWH

Electrical Specifications

Model No.	TLTDLD6R15AWH
Power (W) $\pm 10\%$	15 W
Input Voltage (V)	AC120 V, 60Hz
Efficacy $\pm 3\%$	80 lm/W
Power Factor (PF)	>0.9
Dimmable	0-10 V

Photometric Specifications

CRI	>80
CCT	Selectable
Beam angle	120°
Light Output $\pm 3\%$	1 200 lm

Mechanical Specifications

IP Rating	IP20
Material	Aluminum + Steel box
Lens	Frosted (polycarbonate)
Net Weight	350 g
Product size (mm)	$\pm \text{Ø}174.7 \times 22 \text{ mm}$
Product size (inch)	$\pm \text{Ø}6.85" \times 0.87"$
Operating Humidity	10% - 90%
Operating Temperature	-20°C~45°C
Lifespan (L70)	N/D

Product description:

- Ultra thin 6" recessed down light.
- Type IC.
- Airtight.
- Junction box with quick connector included.
- 5 CCT: selectable 2 700 K, 3 000 K, 3 500 K, 4 000 K and 5 000 K using a switch.
- Color: white.
- Optional installation plate.

Applications:

Houses, schools, shopping centers, etc.

Optional installation plate and fixing bars

