



Modèle affiché: WH



Specifications TLUTD4R9ABK

Electrical Specifications

Model No.	TLUTD4R9ABK
Power (W) ± 10%	9 W
Input Voltage (V)	AC120 V, 60Hz
Efficacy ± 3%	75 lm/W
Power Factor (PF)	>0.9
Dimmable	Triac

Photometric Specifications

CRI	>80
CCT	Selectable
Beam angle	120°
Light Output ± 3%	650 lm

Mechanical Specifications

IP Rating	IP20
Material	Aluminum + Metal box
Lens	Frosted (Polycarbonate)
Net Weight	Box: 175g Luminaire: 130g
Product size (mm)	± Ø123 x 32 mm
Product size (inch)	± Ø4.84" x 1.26"
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 45°C
Lumen maintenance	>66% at 100 000 hours


Product Description:

- Ultra thin 4" recessed down light.
- Type IC.
- Airtight according to ASTM E283-04.
- Junction box with quick connector included.
- 5 CCT: selectable 2 700 K, 3 000 K, 3 500 K, 4 000 K and 5 000 K using a switch.
- No toxic chemicals, RoHS compliant.
- Color: black.
- Optional installation plate.


Applications:

Houses, schools, shopping centers, etc.

Installation plates and fixing bars optional

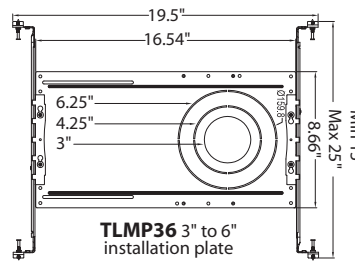

TLMP36 3" to 6" installation plate
+
TLMPHB Fixing bar
(sold separately)



TLMP4 4" installation plate

info@technilight.ca