

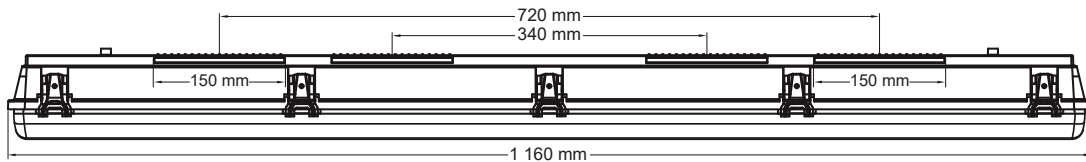


Project:	_____
Dist. / entr.:	_____
Type:	_____ PO: _____
Date:	_____



**TLVP4F30PD IP66 / NEMA 4X**

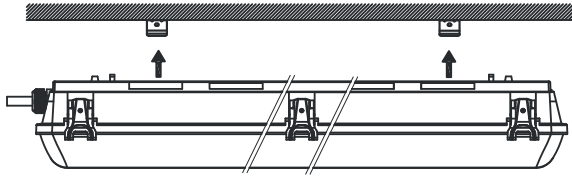

## Specifications TLVP4F30PD

### Electrical Specifications

Model No.	TLVP4F30PD
DLC ID	PL5QMGRW6VAD
Power (W) ± 10%	30 W (DLC 30.4 W)
Input Voltage	AC120-277V, 50/60Hz
Efficacy ± 3%	129.34 lm/W
Power Factor	0.919
Total harmonic distortion	<15%

### Photometric Specifications

CRI	85
CCT	5 000 K
Beam angle	120°
Light Output ± 3%	3 937 lm
Dimmable	0-10V or triac

### Mechanical Specifications

IP Rating	IP66 / NEMA 4X
Material	Polycarbonate
Lens	Frosted
Net Weight	2.1 kg
Product size (mm)	1 160 x 120 x 108 mm
Product size (inch)	± 45-5/8" x 4-11/16" x 4-1/4"
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C
Lumen maintenance	>79% at 100 000 hours

## Product Description:

- Lightweight body material, corrosion resistant, waterproof and dustproof.
- Easy installation with fast connection design, shorten the installation process and save labor cost.
- Perfect replacement for the whole set of T8 and T5 fluorescent lighting fixture.
- Saves up to 60% in electricity consumption compared to fluorescent lighting fixture.
- Body and diffuser could meet the IK08 test requirement.
- Warranty: 5 Years.
- It could be fitted with sensor.
- Other CCT available on special request.
- Clear lens available separately.
- Polycarbonate fasteners included.

## Applications:

Suitable for farm, food processing sector, warehouse, wet locations etc.

[info@technilight.ca](mailto:info@technilight.ca)

[WWW.TECHNILIGHT.CA](http://WWW.TECHNILIGHT.CA)

Pictures for illustration purpose only

rev 2.4.4