


Explosion proof

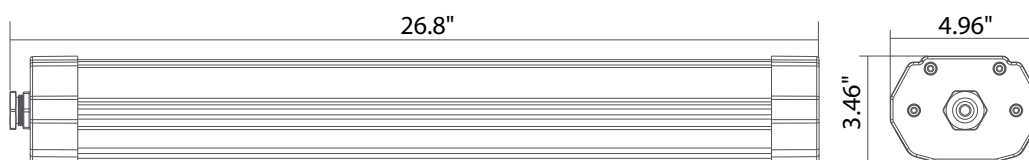

Specifications TLVPE2F36P

Electrical specifications

Model No.	TLVPE2F36P
Power (W) ± 10%	36 W
Input Voltage (V)	AC100-277V, 50/60Hz
Efficacy ± 3%	96 lm/W
Power Factor (PF)	0.9
Surge protection	4 kv

Photometric specifications

CRI	75
CCT	5 000 K
Beam angle	180°
Light Output ± 3%	3 456 lm
Dimmable	Non

Mechanical specifications

IP Rating	IP66
Material	Aluminum + PC
Lens	Frosted
Net Weight	4.5 kg
Product size (mm)	660.4 x 101.6 x 76.2 mm
Product size (inch)	± 26.8 x 4.96 x 3.46 in
Operating Humidity	10% to 90%
Operating Temperature	-40°C to 55°C
Lifespan	50 000 hours

Product description:

- CLASS 1 - DIVISION 2 - GROUP A, B, C, D
CLASS 2 - DIVISION 2 - GROUP F, G
CLASS 3
- No toxic chemicals. Complies with ROHS directives.
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Gray.

Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.
Designed for wet locations.
Indoor and outdoor.