

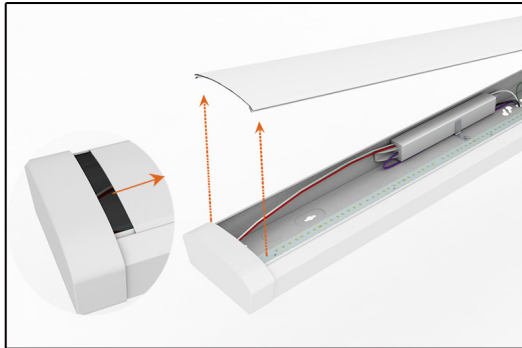



Wraparound LED Strip

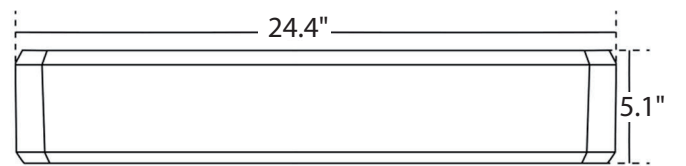

Built-in motion and light sensor.

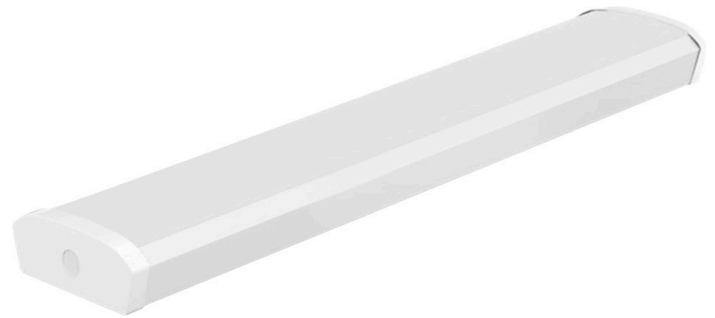

Specifications TLWAUS2F20ADS

Electrical Specifications

Model No.	TLWAUS2F20ADS
DLC ID	N/D
Power (W) selectable $\pm 10\%$	12W / 15W / 20W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy $\pm 3\%$	135 lm/W
Power Factor	≥ 0.9
Surge protection	2 kv
Total harmonic distortion	$\leq 20\%$
Dimmable	0-10V

Photometric Specifications

CRI	> 80	
CCT selectable	3500K / 4000K / 5000K	
Beam angle	120°	
Light Output $\pm 3\%$	12W: 1620 lm	15W: 2025 lm
	20W: 2700 lm	

Mechanical Specifications

IP Rating	IP22
Material	Steel and Polycarbonate
Lens	Frosted
Net Weight	1 kg
Product size (mm)	$\pm 609.6 \times 127 \times 25.4$ mm
Product size (in)	$\pm 24.4" \times 5.1" \times 1.9"$
Operating Humidity	10% to 90%
Operating Temperature	-20°C to 40°C
Lumen maintenance	$> 77\%$ at 100 000 hours

Product description:

- Wide supply voltage range 120-347V.
- Selectable power and CCT.
- Soft and uniform lighting.
- Easy installation with fast connection design, shorten the installation process and save labor cost.
- Save up in electricity consumption compared to fluorescent lighting fixture.
- Warranty: 5 Years.
- Built-in motion and light sensor.
- Ceiling installation or optional suspension kit, not included.

Applications:

Suitable for houses, offices, basements, warehouses, garages, shops, etc.