

Specifications TLWMDU2060ABK

Electrical Specifications

Model No.	TLWMDU2060ABK
DLC ID	N/D
Power (W) ± 10%	20 W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	105 lm/W
Power Factor (PF)	>0.9
Surge protection	2.5 Kv
Total harmonic distortion	N/A

Photometric Specifications

CRI	>80
CCT selectable	3 000 K / 4 000 K / 5 000 K
Beam angle	60°
Light Output ± 3%	2 100 lm
Dimmable	0-10 V

Mechanical Specifications


IP Rating	Damp locations
Material	Aluminum
Lens	Acrylic
Net Weight	1.35 kg
Product size (mm)	± Ø108 x 170.3 x 293.2 mm
Product size (inch)	± Ø4.3" x 6.7" x 11.5"
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 50°C
Lumen maintenance	>64% at 100 000 hours

Product description:

- Up (10W) and down (10W) lighting.
- Selectable CCT.
- Built-in photocell.
- Saves on electricity consumption compared to conventional lighting fixture.
- Color: black.
- Warranty: 5 years.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, corridors, staircases, etc. Indoor and outdoor.

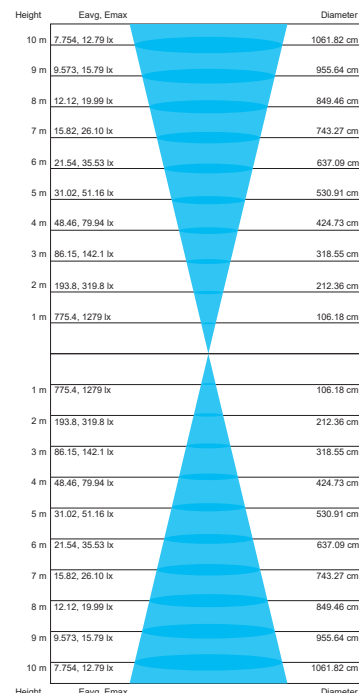

info@technilight.ca

WWW.TECHNILIGHT.CA