


# TPALUS150T4ABK

**Technilight**

**PRO**

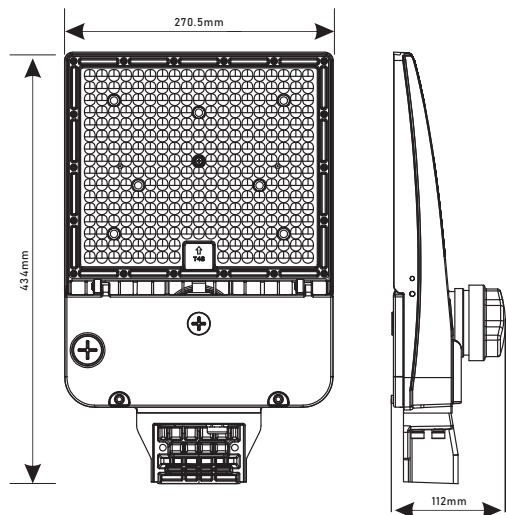

## Specifications TPALUS150T4ABK

### Electrical Specifications

Model No.	TPALUS150T4ABK
DLC ID	S-KJQYXK
Power selectable	80W / 100W / 150W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy ± 3%	134.65 lm/W
Power Factor	0.9
Dimmable	0-10 V
Surge protection	N/A
Total harmonic distortion	≤15%

### Photometric Specifications

CRI	80
CCT selectable	3000K / 4000K / 5000K
Beam angle	Type IV
Light Output ± 3%	Min.: 10 772 lm Max.: 19 885 lm
BUG rating	B4-U3-G4

### Mechanical Specifications

IP rating	IP66
Material	Aluminum
Lens	PC
Net Weight	N/A
Product size (mm)	± 434 x 270.5 x 112 mm
Product size (in)	± 17" x 10.63" x 4.4"
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 50°C
Lumen maintenance	>80% at 100 000 hours
Vibration resistance	3G

### Accessories (not included)

 TPALPABK	Adjustable bracket for walls and square poles	 TPALPMBK	Bracket for walls, square or round poles	 TPALSFBK	"Slip fitter" bracket for 2 3/8" round poles
 TPALTRBK	Trunnion bracket	 TPALTU1BK	"U" bracket	 HD09VR-PHC-DG	PIR motion sensor
 HD06R	Remote control for motion sensor	 JL205C / JL207E	Photocell: AC120-277V #JL205C AC120-347V #JL207E		

### Product description:

- Selectable power and CCT.
- Optional photocell.
- Optional motion sensor.
- Easily replace traditional MH or HPS luminaire fixture.
- Powerful light efficacy.
- Saves in electricity consumption compared to fluorescent lighting fixture.
- Color: black.  
Other colors available on request.
- Warranty: 5 years.

### Applications:

Outdoor parking and wide area.

info@technilight.ca

**WWW.TECHNILIGHT.CA**