


TPALUS150T4BBK

Technilight

PRO

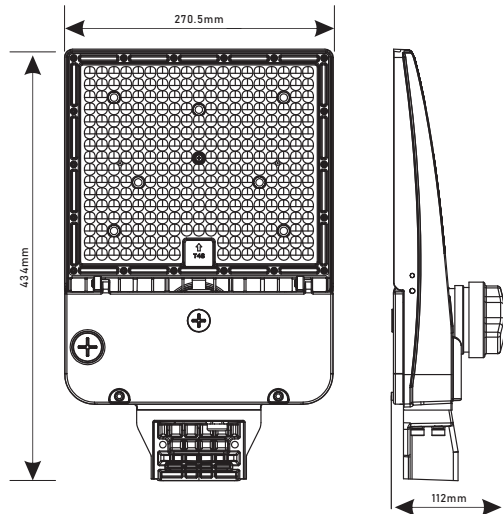

Specifications TPALUS150T4BBK

Electrical Specifications

Model No.	TPALUS150T4BBK
DLC ID	S-KJQYXK
Power selectable	80W / 100W / 150W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy $\pm 3\%$	115 lm/W
Power Factor	0.9
Dimmable	0-10 V
Surge protection	N/A
Total harmonic distortion	$\leq 15\%$

Photometric Specifications

CRI	80
CCT selectable	2200K
Beam angle	Type IV
Light Output $\pm 3\%$	9200 lm / 11500 lm / 17250 lm
BUG rating	B3-U0-G3

Mechanical Specifications

IP rating	IP66
Vibration resistance	3G
EPA	0.28 ft ²
Material	Aluminum
Lens	PC
Net Weight	3.5 kg
Product size (mm)	$\pm 434 \times 270.5 \times 112$ mm
Product size (in)	$\pm 17" \times 10.63" \times 4.4"$
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 50°C
Lumen maintenance	>80% at 100 000 hours

Accessories (not included)

 TPALPABK	Adjustable bracket for walls and square poles	 TPALPMBK	Bracket for walls, square or round poles	 TPALSFBK	"Slip fitter" bracket for 2 3/8" round poles
 TPALTRBK	Trunnion bracket	 TPALTU1BK	"U" bracket	 HD09VR-PHC-DG	PIR motion sensor
 HD06R	Remote control for motion sensor	 JL205C / JL207E	Photocell: AC120-277V #JL205C AC120-347V #JL207E		

Product description:

- Selectable power.
- Optional photocell.
- Optional motion sensor.
- Easily replace traditional MH or HPS luminaire fixture.
- Powerful light efficacy.
- Saves in electricity consumption compared to fluorescent lighting fixture.
- Color: black. Other colors available on request.
- Warranty: 5 years.

Applications:

Outdoor parking and wide area.

info@technilight.ca

WWW.TECHNILIGHT.CA