



TPALUS500T4ABK

Technilight

PRO

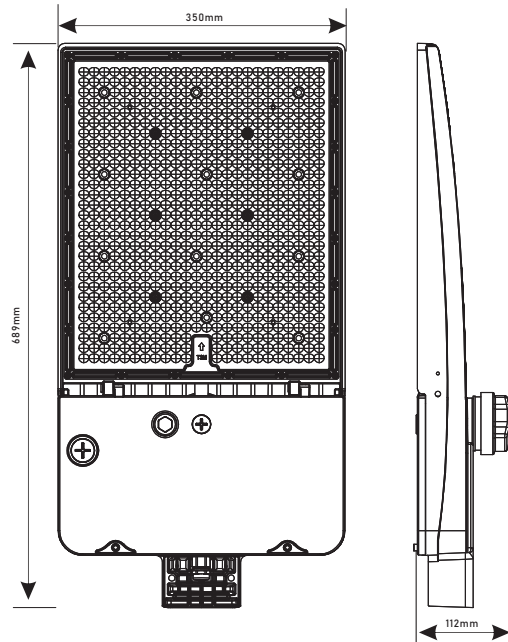

Selectable Watt and CCT

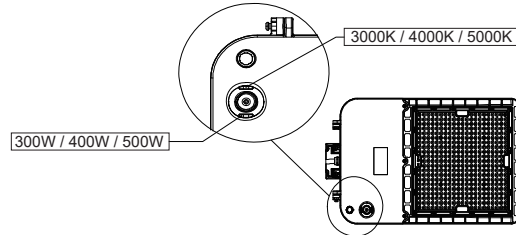

Specifications TPALUS500T4ABK

Electrical Specifications

Model No.	TPALUS500T4ABK
DLC ID	S-WKNV8X
Power selectable	300W / 400W / 500W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy $\pm$ 3%	133.45 lm/W
Power Factor	0.9
Dimmable	0-10 V
Surge protection	N/A
Total harmonic distortion	$\leq$ 15%

Photometric Specifications

CRI	81
CCT selectable	3000K / 4000K / 5000K
Beam angle	Type IV
Light Output $\pm$ 3%	Min.: 40 035 lm Max.: 66 725 lm
BUG rating	B5-U0-G5

Mechanical Specifications

IP rating	IP66
Vibration resistance	3G
EPA	0.48 ft ²
Material	Aluminum
Lens	PC
Net Weight	7.9 kg
Product size (mm)	$\pm$ 689 x 350 x 112 mm
Product size (in)	$\pm$ 27 x 13.8 x 4.4"
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 50°C
Lumen maintenance	>80% at 100 000 hours

Accessories (not included)

	Adjustable bracket for walls and square poles		Bracket for walls, square or round poles		"Slip fitter" bracket for 2 3/8" round poles
TPALPABK		TPALPMBK		TPALSFBK	
	Trunnion bracket		"U" bracket		PIR motion sensor
TPALTRBK		TPALTU3BK		HD09VR-PHC-DG	
	Remote control for motion sensor		Photocell: AC120-277V #JL205C AC120-347V #JL207E		Light back shield
HD06R		JL205C / JL207E		TPALBLS3BK	

Product description:

- Selectable power and CCT.
- Optional photocell.
- Optional motion sensor.
- Easily replace traditional MH or HPS luminaire fixture.
- Powerful light efficacy.
- Saves in electricity consumption compared to fluorescent lighting fixture.
- 2 200 K available on request.
- Color: black. Other colors available on request.
- Warranty: 5 years.

Applications:

Outdoor parking and wide area.

info@technilight.ca

WWW.TECHNILIGHT.CA