


TPLSUS2F30ADS

Technilight

PRO

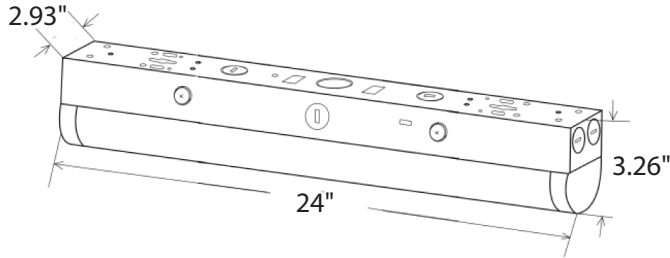

Specifications TPLSUS2F30ADS

Electrical Specifications

Model No.	TPLSUS2F30ADS
DLC ID	N/D
Power (W) selectable $\pm 10\%$	15W / 18W / 22W / 26W / 30W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy $\pm 3\%$	140 lm/W
Power Factor (PF)	0.9
Dimmable	0-10 V
Surge protection	2 kv
Total harmonic distortion	<20%

Photometric Specifications

CRI	80
CCT selectable	30K / 35K / 40K / 50K / 65K
Beam angle	120°
Light Output $\pm 3\%$	Min.: 2 100 lm Max.: 4 200 lm

Mechanical Specifications

IP Rating	IP20
Material	Steel + Acrylic
Lens	Frosted
Net Weight	1 kg
Product size (mm)	$\pm 610 \times 50.8 \times 76$ mm
Product size (inch)	$\pm 24" \times 2.93" \times 3.26"$
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 40°C
Lumen maintenance	>76% at 100 000 hours

Product description:

- Wide supply voltage supply range 120-347 V.
- Selectable power and CCT.
- Motion and daylight sensor included.
- Installation: surface mount or suspended.
- Dimmable 0-10 V.
- Warranty: 5 years.

Applications:

Suitable for houses, basements, warehouses, garages, shops, etc.

Optional accessories



HD06R
Remote control setting
for sensor



TLSSR
Suspension kit

info@technilight.ca

WWW.TECHNILIGHT.CA