
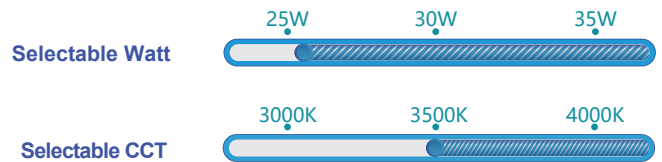
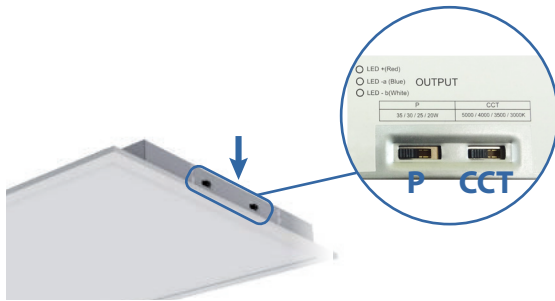


# TPPLUS14W35A

**Technilight**

**PRO**

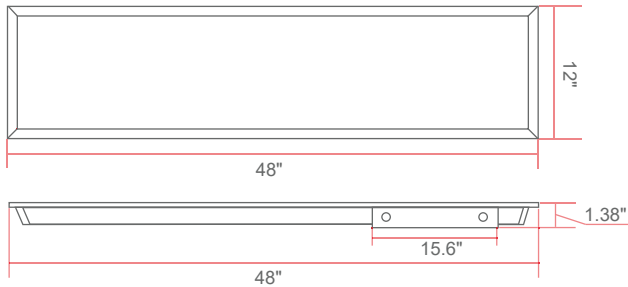

## Specifications TPPLUS14W35A

### Electrical Specifications

Model No.	TPPLUS14W35A
DLC ID	S-N92H3J
Power (W) selectable	25W / 30W / 35W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy ± 3%	125 lm/W
Power Factor (PF)	0.9
Total Harmonic Distortion	≤15%






### Photometric Specifications

CRI	83
CCT selectable	3 000 K / 3 500 K / 4 000 K
Beam Angle	120°
Light Output ± 3%	Min.: 3 125 lm Max.: 4 375 lm
Dimmable	0-10 V

### Mechanical Specifications

IP Rating	IP40
Material	Aluminum + metal sheet
Lens	Frosted PS
Net Weight	2.27 kg
Product size (mm)	± 1 213 x 303 x 30 mm
Product size (in)	± 48" x 12" x 1.38"
Operating Humidity	10% - 90%
Operating Temperature	-25°C ~ 50°C
Lifespan (L70)	50 000 hours

### Optional accessories

 Surface installation frame 1' x 4' white <b>TLPBL14WMF</b>	 Recessed mounting frame 1' x 4' white <b>TLPL14RMFWH</b>	 6' suspension kit <b>TLPBLSR</b>
 Emergency battery <b>BLD-HM08D</b>	 Extension for junction box <b>TPPLJBE</b>	

### Product description:

- Backlight LED panel luminaire.
- Selectable power and CCT with a switch.
- Seismic support included.
- Installation: suspended / suspended ceiling / surface mount with optional mounting frame.
- Type "IC".
- 0-10 V dimmable.
- Uniform brightness, high performance, low energy consumption and low radiant heat.
- Warranty: 5 years.

### Applications:

Office, business place, clinic, airport, commerce, hotel, basement, etc.

[info@technilight.ca](mailto:info@technilight.ca)

**WWW.TECHNILIGHT.CA**