



WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.

FEATURES

1. Please call a licensed electrician for installation.
2. Drill 1/2" KO in the sheet metal for TSBSPF4A installation, make sure the TSBSPF4A well fixed in the luminaire.
3. Screw in the sensor into the receptacle and make sure the connection is tight. Ensure the rubber gasket touches the outside surface of the fixture.
4. Attach the lens to sensor and turn the lens module clockwise to ensure it locks in place.
5. Please refer below diagram for Wiring.
6. Return power back to source.
7. Commissioned the sensor via Technilight Smart App.

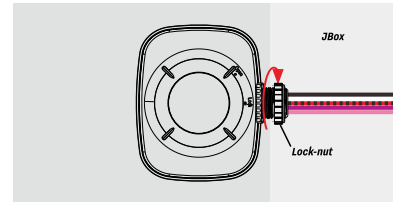

WIRING

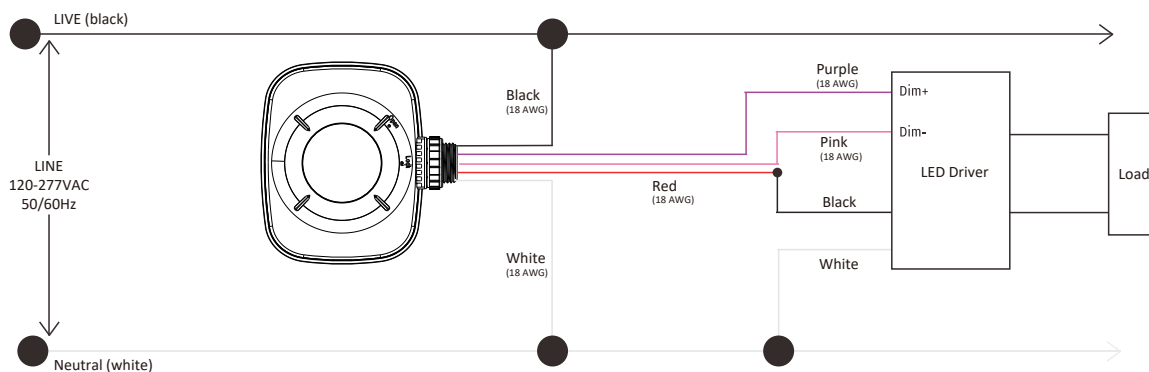

TIPS: This Bluetooth device is compatible with Technilight Smart lighting control system only.

How to install Technilight Smart APP?

Download our app:



Technilight Smart
Google play
Android



Technilight Smart
Apple store
iOS

WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.