


WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.


FEATURES

1. Please call a licensed electrician for installation.
2. Drill 1/2" KO in the sheet metal for TSBSPF9D installation, make sure the TSBSPF9D well fixed in the luminaire. (If the light fixture does not have a 1/2" outlet provided for this purpose.)
3. Screw in the sensor into the receptacle and make sure the connection is tight. Ensure the rubber gasket touches the outside surface of the fixture.
4. Attach the lens to sensor and turn the lens module clockwise to ensure it locks in place.
5. Please refer below diagram for Wiring.
6. Return power back to source.
7. Commissioned the sensor via Technilight Smart App.

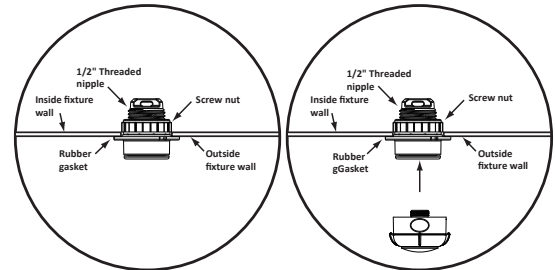


HOW TO ADD

1. Press and hold the Reset button for three seconds until the blue indicator light start flashing continuously, then release it.
2. Add TSBSPF9D to the switch page on the app.

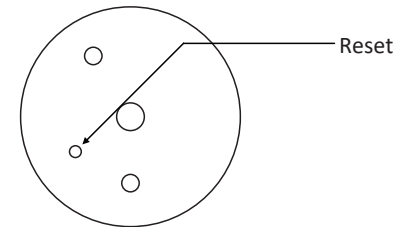

WIRING

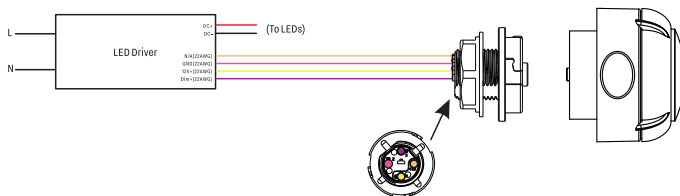


How to install Technilight Smart APP?

Download our app:



Technilight Smart
Google play
Android



Technilight Smart
Apple store
iOS

WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.